

LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

LA-UR-89-1967
DE89 014255

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405 ENG 36

LA-UR--89-1967

DE89 014255

TITLE FOIL IMPLOSION STUDIES ON PEGASUS

AUTHOR(S) J. C. Cochrane, R. R. Bartsch, and F. Begay, P-1
H. W. Kruse, P-14
H. Oona, M-6
J. V. Parker, P-DO
P. J. Turchi, R&D Associates

SUBMITTED TO Seventh IEEE Pulsed Power Conference
Monterey, California

June 11-14, 1989

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This document is the property of the United States Government and is loaned to you by the United States Government. It and its contents are not to be distributed outside the United States Government.

This document is the property of the United States Government and is loaned to you by the United States Government. It and its contents are not to be distributed outside the United States Government.



Los Alamos Los Alamos National Laboratory
Los Alamos, New Mexico 87545

FOIL IMPLOSION STUDIES ON PEGASUS*

J. C. Cochrane, R. R. Bartsch, F. Begay, H. W. Kruse,
H. Oona, J. V. Parker, and P. J. Torchii**

Los Alamos National Laboratory
Physics Division
P. O. Box 1663, MS E526
Los Alamos, New Mexico 87550

Abstract

PEGASUS is a 1.5 MJ capacitor bank facility used in the Los Alamos Trailmaster foil implosion program. The experiments on this facility are to serve as a diagnostic testbed and foil physics benchmark for foil implosions with explosive generators as drivers. During the first year of operation, foil implosions have been driven by discharging the bank directly into a very thin Aluminum 2500 Å thick free-standing foil without any pulse sharpening techniques; so-called "direct drive." These direct drive experiments have served as initial tests to optimize bank performance and foil implosion experimental techniques. The results to date are presented below.

PEGASUS Facility

The PEGASUS pulsed power facility is a 1.5 MJ, 216 μf , 120 kV capacitor bank. With our present load chamber, which is designed for use on explosive generators as well as with the capacitor bank, the rise time of the current is $\sim 4 \mu\text{s}$. Total inductance is 27 nH and the bank inductance is $\sim 4 \text{ nH}$. The capacitors are Maxwell 60 kV, 6 μf capacitors arranged into four modules on the periphery of a 20-ft diameter radial transmission line. The modules, similar to the Maxwell Shiva modules, are charged to a maximum of $\sim 60 \text{ kV}$ forming a two stage Marx. For the data presented here, the capacitors are protected from excessive ringing by a 100 m Ω SS foil resistor connected between the plates of the transmission line to the addition inherent resistance of the PEGASUS bank of 0.5 m Ω . The modules were switched via detonator switches. For reasons given below, Maxwell rail gap switches have now been installed as start switches.

The maximum current of the capacitor bank into the load chamber in present use is $\sim 10 \text{ MA}$. To date, a peak current of 7 MA has been delivered into a dummy load at 88 kV charge voltage. With direct drive experiments, the foil implodes in $\sim 2 \mu\text{s}$ or less at about half the quarter cycle time of the bank. Thus, generating more current means more energy is dissipated in the load chamber as diminishing returns are realized in foil energy as voltage and current are raised. Our next set of experiments will use a Plasma Flow Switch as a pulse sharpening device so that it will be possible to drive the foil implosion at the peak current of the capacitor bank and deliver maximum energy into the foil.

Detonator switches were chosen initially for reasons of cost, because their current and coulomb capacities are very high, and because of their high reliability. Detonator switched operation has not resulted in any problems during the past year.

However, jitter has proven with the detonator switches to be a problem. We have made continuing improvements in the switches but there remains a "foot" where i initially is less than expected by $\sim 30\text{-}50\%$ for a period of 300-500 ns. Since a precisely known current vs. time profile is required to investigate 2-D effects of foil instabilities during the implosion, we are replacing the detonator switches with rail gaps. Because of the coulomb limit of the rail-gap switches, detonator-switched crowbars will be used for capacitor bank operation at voltages significantly above 80 kV.

The load chamber (powerflow channel) is shown below in Figure 1. The coaxial section, $\sim 40 \text{ cm}$ diameter, mounts onto either our capacitor bank or an explosive generator. The negative electrode (Aluminum) is soft-anodized and the channel is routinely hi-potted to 160 kV DC before use on a foil implosion.

LAGUNA POWERFLOW CHANNEL

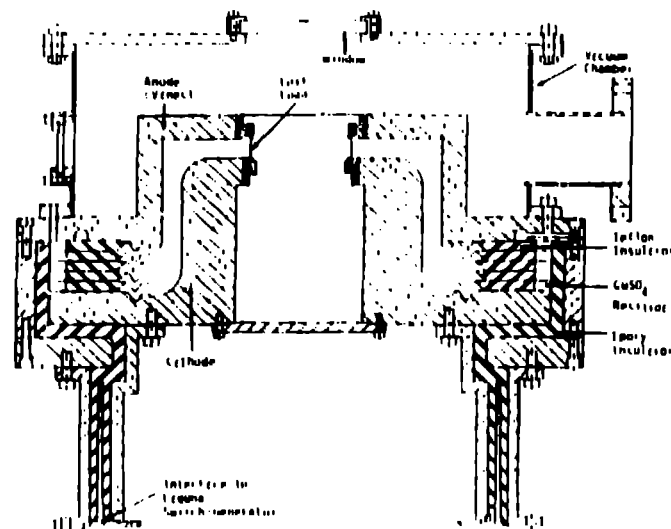


Figure 1. Powerflow Channel

Vacuum pressures are typically $\sim 10^{-5}$ Torr when we fire. We have not observed shorting of the channel during the initial 1/2 cycle of the current rise. The foil mounting rings are held in place by spring loaded fingers, which are under load when the foil manufacturing mandrel is removed. The mandrel has similar spring loaded fingers to grip the foil plugs. This technique allows the free statelag, $\sim 300 \text{ \AA}$ thick, 2 cm high, 19 cm diameter Aluminum foil to be installed with a minimum of wrinkles.

Experimental Results

Diagnostics fielded on the experiments include a Rogowski, a capacitive V probe, several channels of Faraday-rotation current measurements, a four-channel XRD array, an x-ray pinhole camera, a single channel bolometer, VUV spectrometer, and optical cameras. Current (I) vs. Time data (shown in Figure 2 below) shows the effect of the foil implosion as an ~50% notch at ~2 μ sec on the rise of the current.

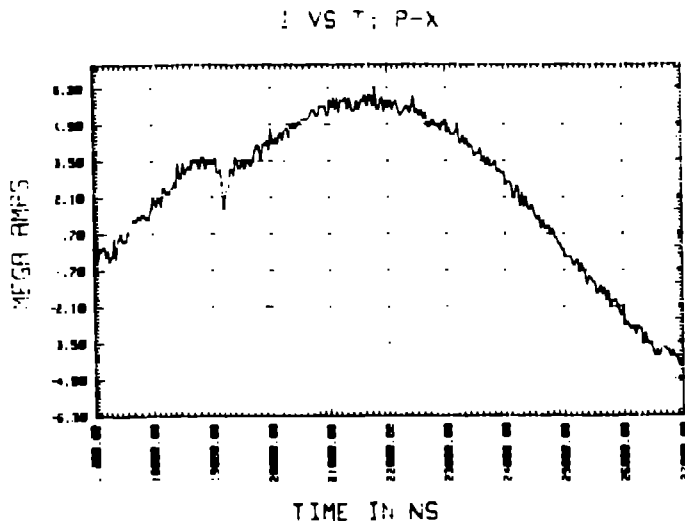


Figure 2. Effect of the foil implosion at the rise of the current.

Calculated, slug-model implosions occur about 100-300 ns earlier than experimentally observed; however, the detonator switches are believed to have a resistive phase which retards the initial rise of the current. The current values at implosion time and magnitude of the current dip are in agreement between the experimental and calculated values. The slug-model implosion on the whole appears to characterize the coarse features of the foil implosion.

The bolometer measured 19 kJ of radiated energy for shot up to 10 from 50 μ V to 2 keV. An energy estimate made from the above current dip yields ~100 kJ into foil kinetic energy. The capacitive voltage probe located on the powerflow channel halfway along the feed system inductively showed a 500 kV spike at foil implosion time. XRD data shows an x-ray burst at implosion time with width of 200 ns. The burst has two peaks. These results are typical. The twin peaks at the beginning to end of the pulse possibly suggest a precursor of foil mass arriving on axis before the main implosion. A typical width is 200 ns, though we have had a width of 150 ns on one shot. Effective blackbody temperature of ~20 eV is inferred from the XRD data assuming a 1 cm diameter source. Filaments are present midway to measure the diameter of this source.

Summary

Pulse-driven foil implosion shots filed to date on PEGASUS have provided results in good agreement with slug-model calculations. Instability issues and Z-pinch effects will be addressed in a series of shots using the newly installed Maxwell cathode start switches. This upcoming shot series will provide direct design experiments by providing explosion data for benchmarking codes capable of modeling lateral level instabilities.

Pulse-sharpened plasma-flow switch experiments which follow will be designed and analyzed utilizing these codes.

Acknowledgements

We acknowledge the expert help of B. Anderson, H. Reed, G. Sandoval, and M. Trujillo.

References

- [1] J. H. Degnan, et al., IEEE Trans. Plasma Sci., Vol. PS-15, No. 6, pp. 760-756, 1987.