


**Structured Shock and Thin Shell Experiments  
on the OMEGA Laser at the  
Laboratory for Laser Energetics  
of the University of Rochester**



**Structured Shock/Thin Shell Campaign  
ID7-FY99  
June 22 –24, 1999**

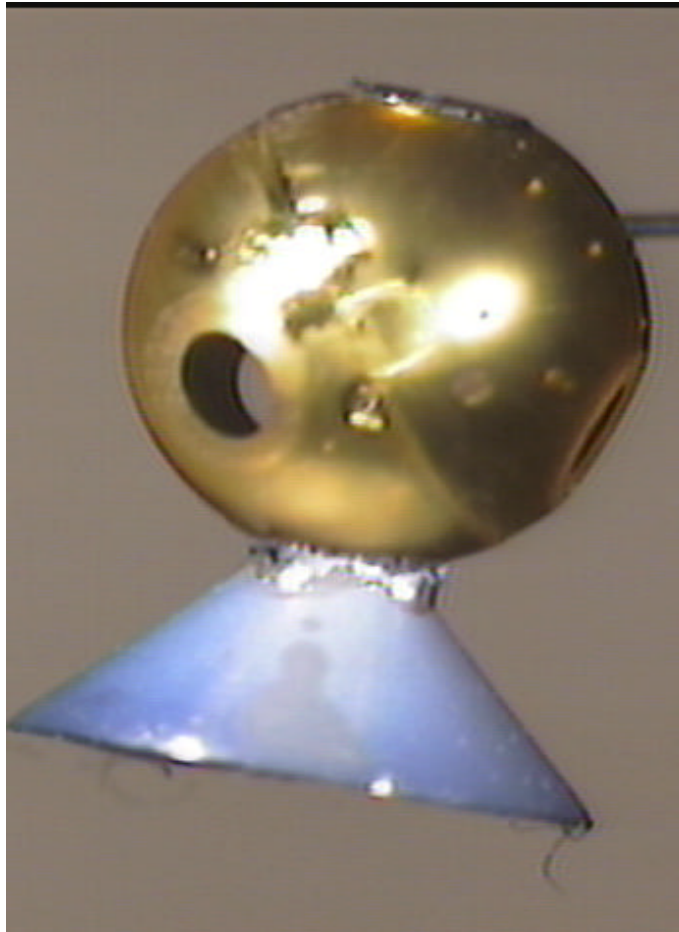

## Table of Contents

Goals of the Experiments .....	3
Shot Plan for the Entire Week.....	4
<b><i>Structured Shock</i></b>	
Structured Shock Experiment – Goals .....	5
Structured Shock Experiment – Target Designs .....	6
Structured Shock Experiment – Laser Conditions .....	13
Structured Shock Experiment – Diagnostic Settings .....	17
Structured Shock Experiment – SOP Pointing & Focusing .....	24
Structured Shock Experiment – Colorful Views.....	25
<b><i>Thin Shell Rayleigh-Taylor</i></b>	
Thin Shell Rayleigh-Taylor Experiment – Goals.....	26
Thin Shell Rayleigh-Taylor Experiment – Target Designs.....	27
Thin Shell Rayleigh-Taylor Experiment – Laser Conditions.....	30
Thin Shell Rayleigh-Taylor Experiment – Diagnostic Settings.....	34
Thin Shell Rayleigh-Taylor Experiment – Colorful Views .....	37
Contact List of Key Personnel.....	38
Map of LLE and Environs.....	39

This document is intended to give an overview of this experimental campaign. Where information conflicts with experimental configurations submitted by official methods, those configurations take precedence. Contact the principal investigator prior to making any changes in the configuration to accommodate conflicts of information based on this document.

This document was produced by the Los Alamos National Laboratory under the auspices of the United States Department of Energy under contract No. W-7405-ENG-36.

## ***Goals of the Experiments***

This run week consists of two experiments using tetrahedral hohlraums as a uniform source of radiation drive. The first two days are devoted to experiments investigating the flow of a shock past a material interface. As part of this experiment, the laser beam pointing will be measured, the SOP will be qualified further, a series of shots with double interfaces will be shot, the SOP and side-on radiography will be compared, and the drive from a tetrahedral hohlraum will be measured.

The third day of this run week is designed to complete the experiments begun in December 1998 on thin-shell Rayleigh-Taylor growth in copper. The run day will include shots to verify laser pointing, diagnostic pointing, modulation transfer function (MTF) measurements at the spatial frequency of interest, and RT experiments. The RT packages are of two types: a package “tamped” by a Be filter, and an “untamped” package where the Be merely filters the drive radiation. These will highlight the differences between the classical and ablatively driven Rayleigh-Taylor instabilities, respectively.

The primary goals of each experiment are summarized as:

### ***Structured Shock***

- Measure shock propagation
- Tetrahedral drive measurements
- Further qualify the SOP (Streaked Optical Pyrometer)

### ***Thin Shell Rayleigh-Taylor***

Complete data set of nonlinear Rayleigh-Taylor experiments begun in December 1998.

## Shot Plan for the Entire Week

Major facility changes:

Day 2: Change timing of 5 backlighter beams

Day 2: Place imaging x-ray streak camera in TIM 4, change pulse shape to PS26

Day 3: Massive repointing and retiming of 21 backlighter beams

Change all TIM diagnostics

	<b>Tuesday, 6/22</b>	<b>Wednesday, 6/23</b>	<b>Thursday, 6/24</b>
	<b>BL: 0.0 and 1.1 ns</b>	<b>BL: 1.1 and 2.2 ns</b>	<b>PS26; Move BL's (21 beams)</b>
<b>1</b>	<b>Pointing - Sphere/SOP Timing</b>	<b>Diag Timing* - SOP Res</b>	<b>Pointing - Sphere</b>
<b>2</b>	<b>Pointing - Sphere - backlighter</b>	<b>Double Interface-T</b>	<b>Diag Timing - Thin Shell</b>
<b>3</b>	<b>SOP Absolute Timing*</b>	<b>Double Interface-U</b>	<b>Diag Timing - Thin Shell</b>
<b>4</b>	<b>Diag Timing - SOP Resolution</b>	<b>Radial Shock Motion</b>	<b>Thin Shell - Fe backlighter</b>
<b>5</b>	<b>Diag Timing* - SOP Resolution</b>	<b>Radial Shock Motion</b>	<b>Thin Shell - Fe backlighter</b>
<b>6</b>	<b>Double Interface-T</b>	<b>Double Interface-T</b>	<b>Thin Shell - Fe backlighter</b>
<b>7</b>	<b>Double Interface-U</b>	<b>Double Interface-U</b>	<b>Thin Shell - Fe backlighter</b>
<b>8</b>	<b>Shock Coincidence</b>	<b>Radial Shock Motion</b>	<b>Thin Shell - Fe backlighter</b>
<b>9</b>	<b>Shock Coincidence</b>	<b>Radial Shock Motion*</b>	<b>Thin Shell - Fe backlighter</b>
		<b>PS26; Insert SSC4</b>	
<b>10</b>	<b>Double Interface-T</b>	<b>Side-on Thin Shell</b>	<b>Thin Shell - Fe backlighter</b>
<b>11</b>	<b>Double Interface-U</b>	<b>Side-on Thin Shell</b>	<b>Thin Shell - Fe backlighter</b>
<b>12</b>	<b>Shock Coincidence</b>	<b>Side-on Thin Shell*</b>	<b>Repeat one of above</b>
<b>13</b>	<b>Repeat Double Interface</b>	<b>Repeat Double Interface</b>	
	<b>BL at 0.0 ns: 42, 44, 53, 57, 62</b>	<b>BL at 1.1 ns: 45, 47, 40, 51,</b>	<b>BL 2.5 ns: 13, 18, 32, 59, 68, 69</b>
	<b>BL at 1.1 ns: 45, 47, 40, 51, 69</b>	<b>BL at 2.2 ns: 42, 44, 53, 57</b>	<b>BL 3.9 ns: 11, 14, 24, 47, 66, 67</b>
	<b>Note: Foils for SOP timing if needed</b>		
	<b>*drop as necessary</b>		

June 11, 1999

## ***Structured Shock Experiment – Goals***


**Principal Investigators: George Kyrala and Steve Batha, LANL P-24**

**Theory: S. Robert Goldman, LANL XPA**


The objectives of the experiments are to study the generation and propagation of shocks through material inhomogeneities involving either structured surfaces or material filled joints. The experiments use shocks generated by radiation drive from tetrahedrally illuminated spherical hohlraums with four laser entrance holes (LEH's). A fifth hole facing the SOP port mounts the package for either face-on or side-on radiography. The SOP will measure the temporal and spatial distribution of the shock breakout at the rear surface of the load. Side-on radiography at the Ti He-like lines will be used to measure both the spatial distribution of the shock front and the density variation across the shock.

## Structured Shock Experiment – Target Designs


Structured Shock Hohlraum – sort of the top view

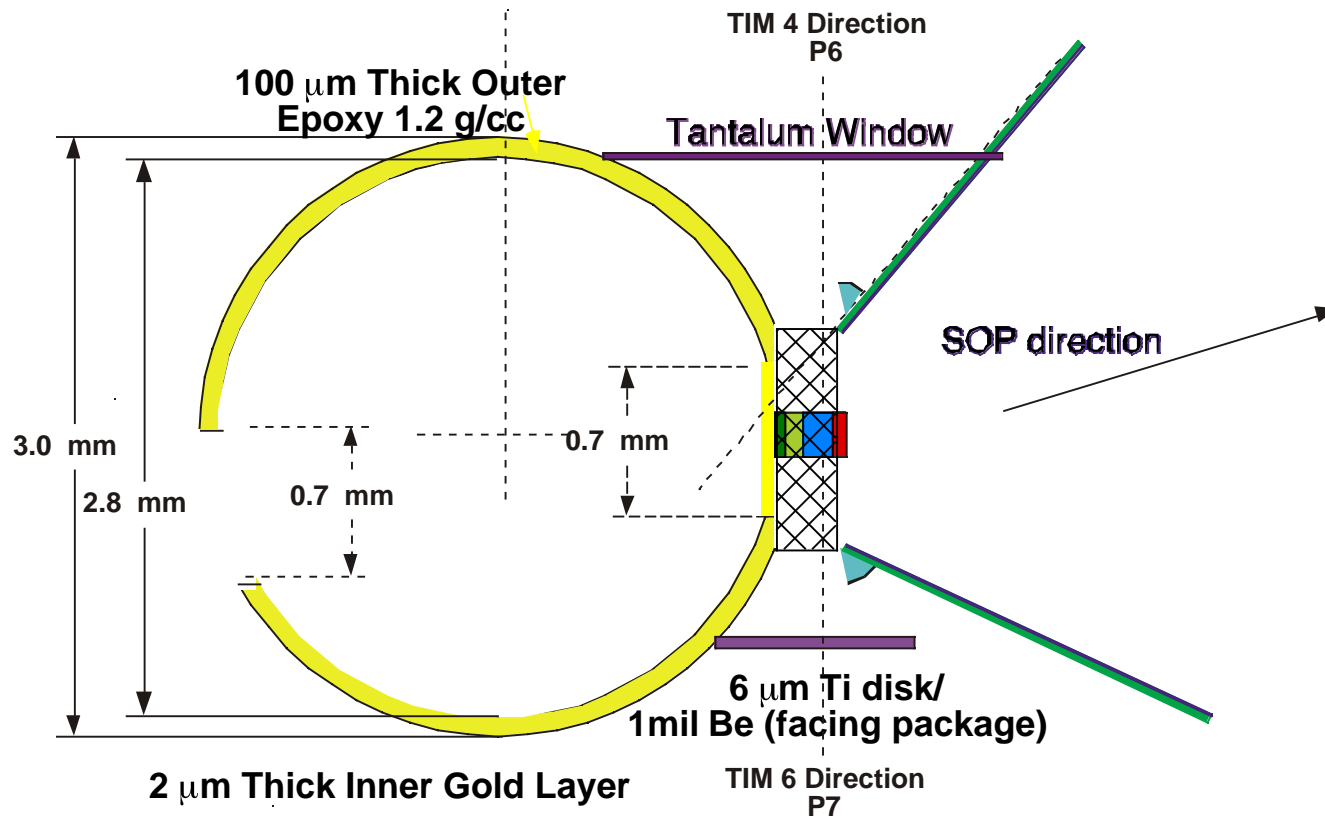

Double Interface – Tamped Package

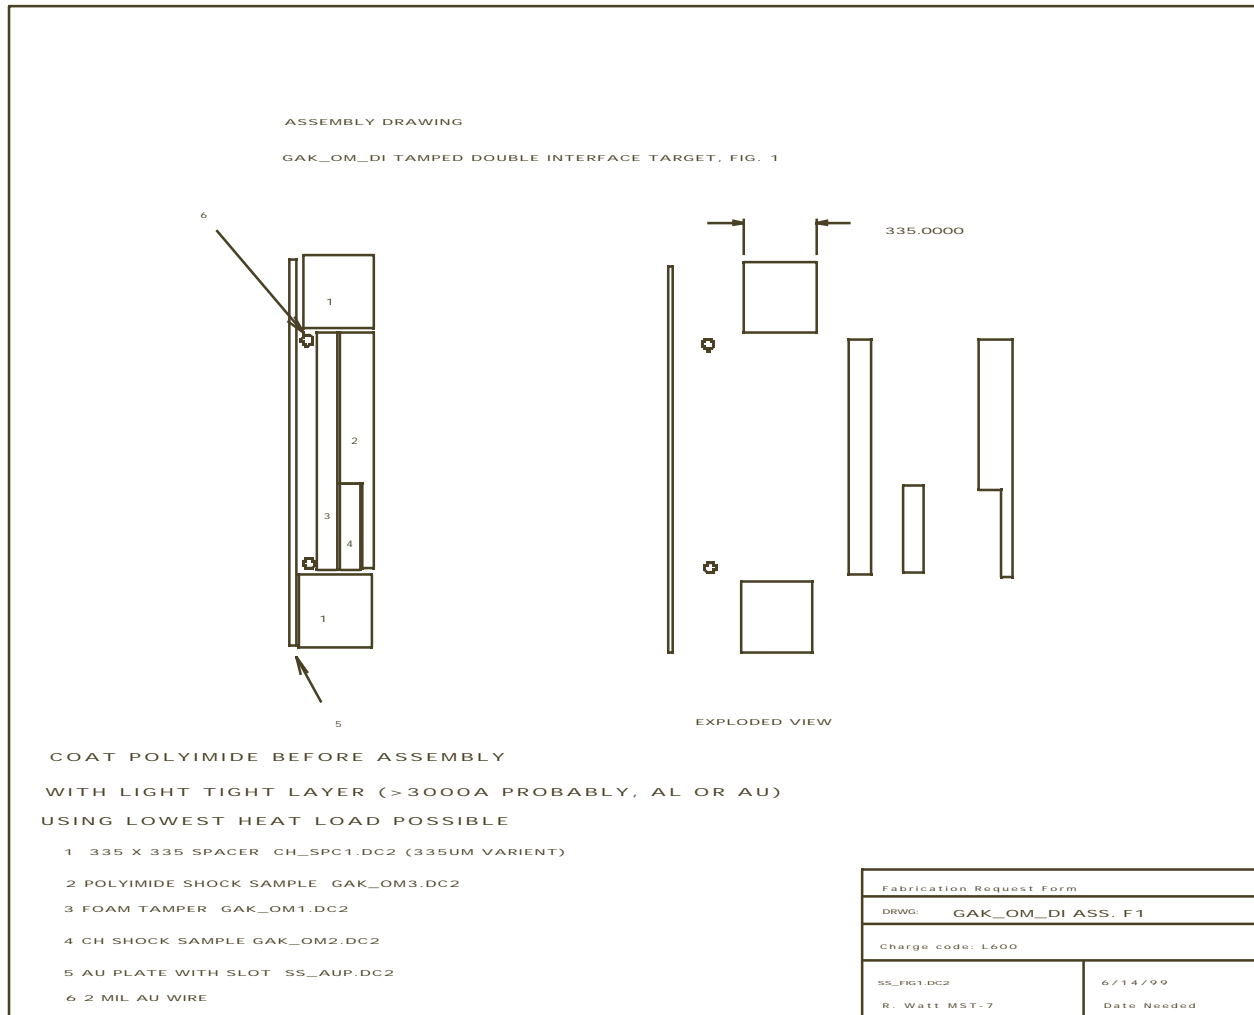


Double Interface – Untamped Package

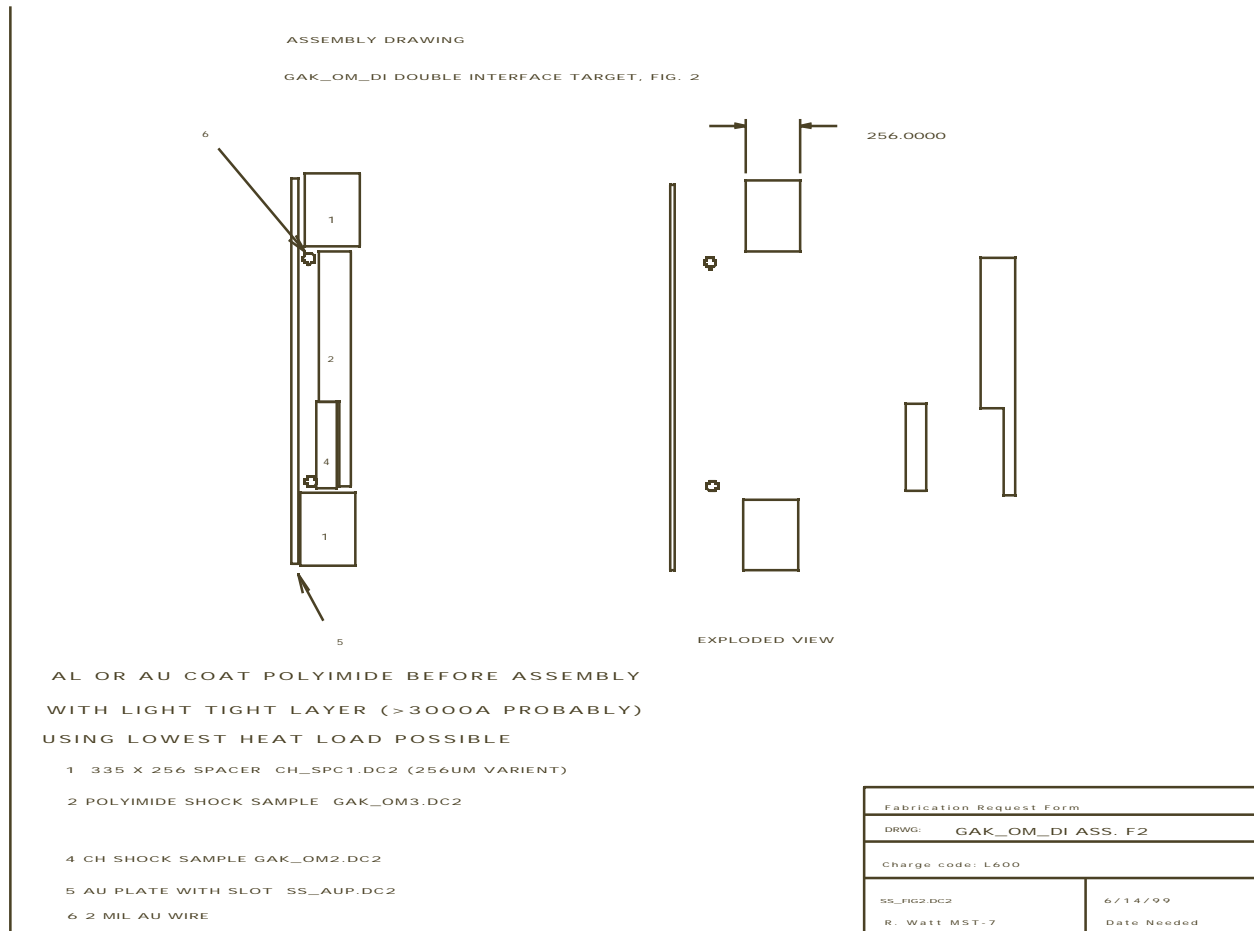


Diagnostic Timing and Poiting – SOP MTF measurement




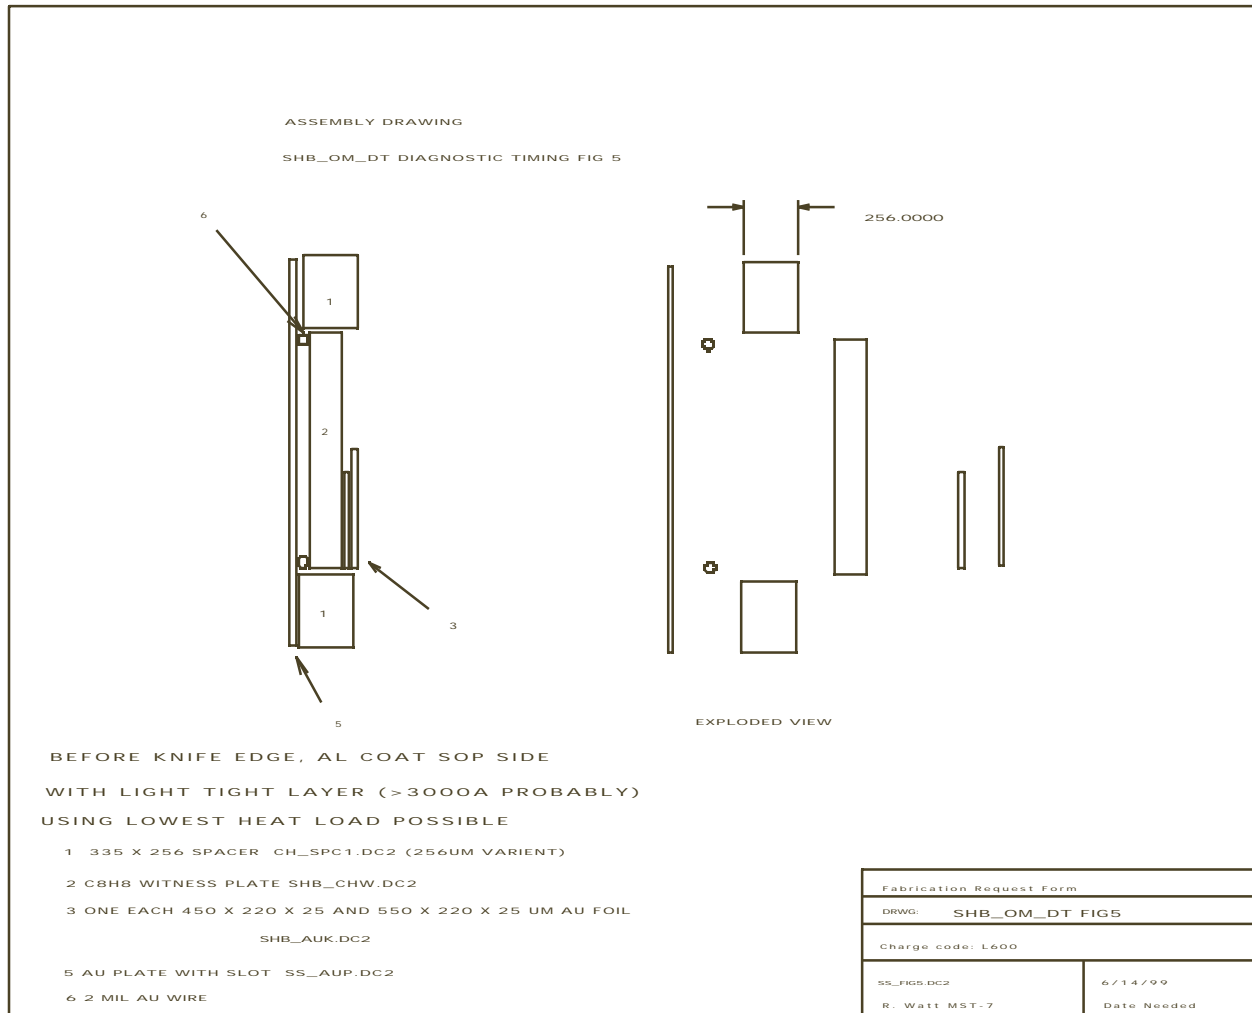


Shock Coincidence

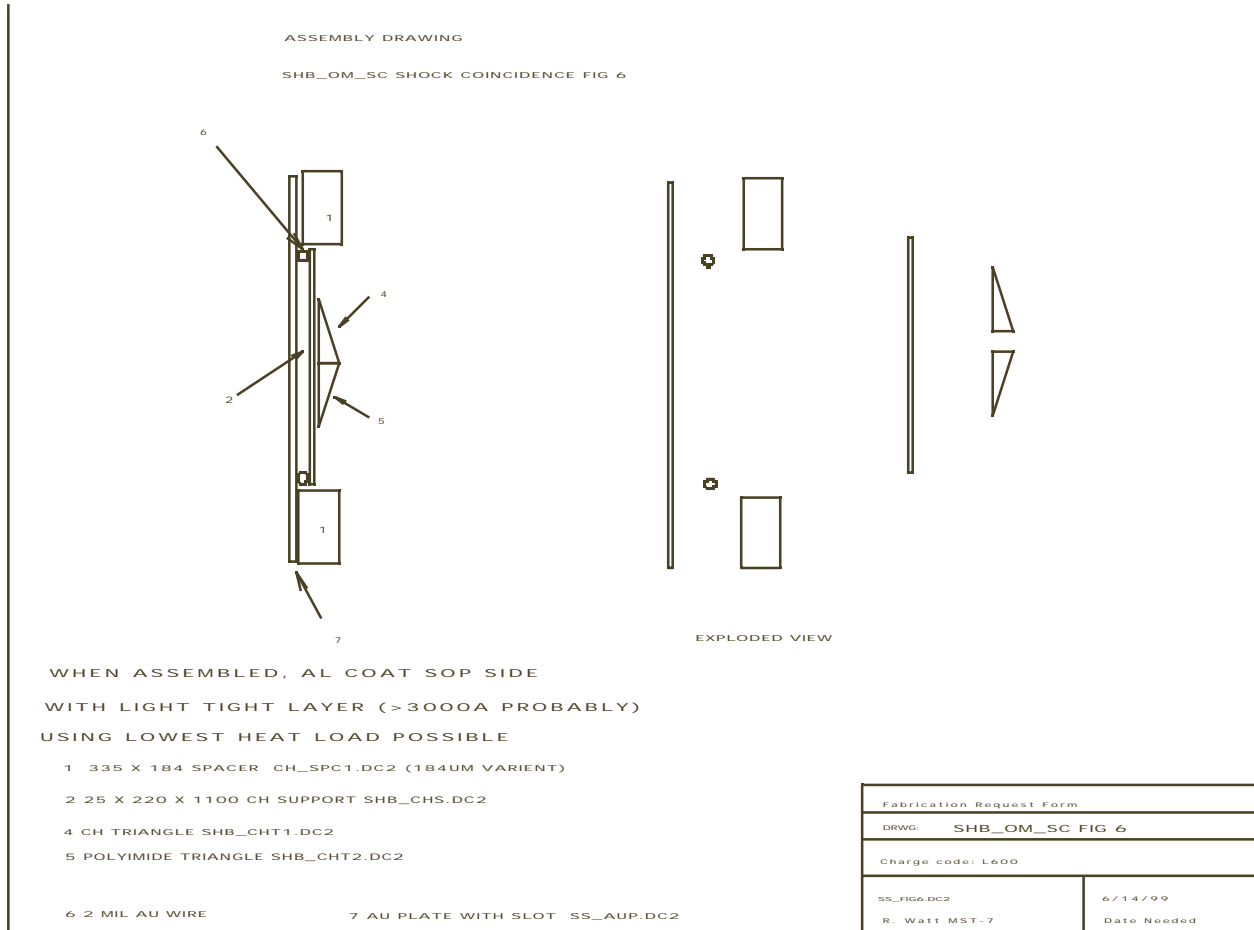

Radial Shock Motion Package

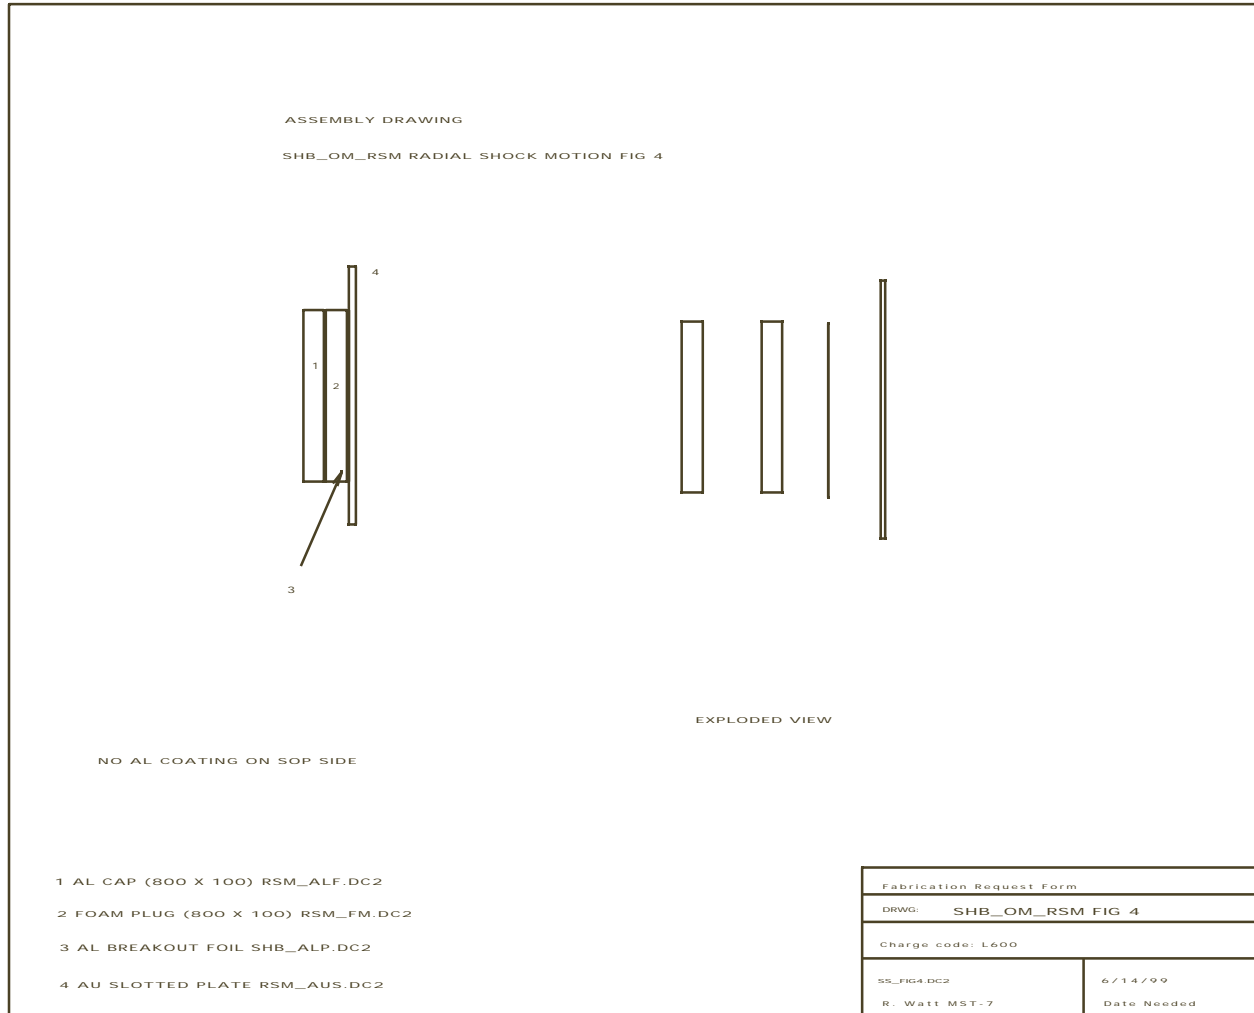

Thin-Shell Side-On Radiography

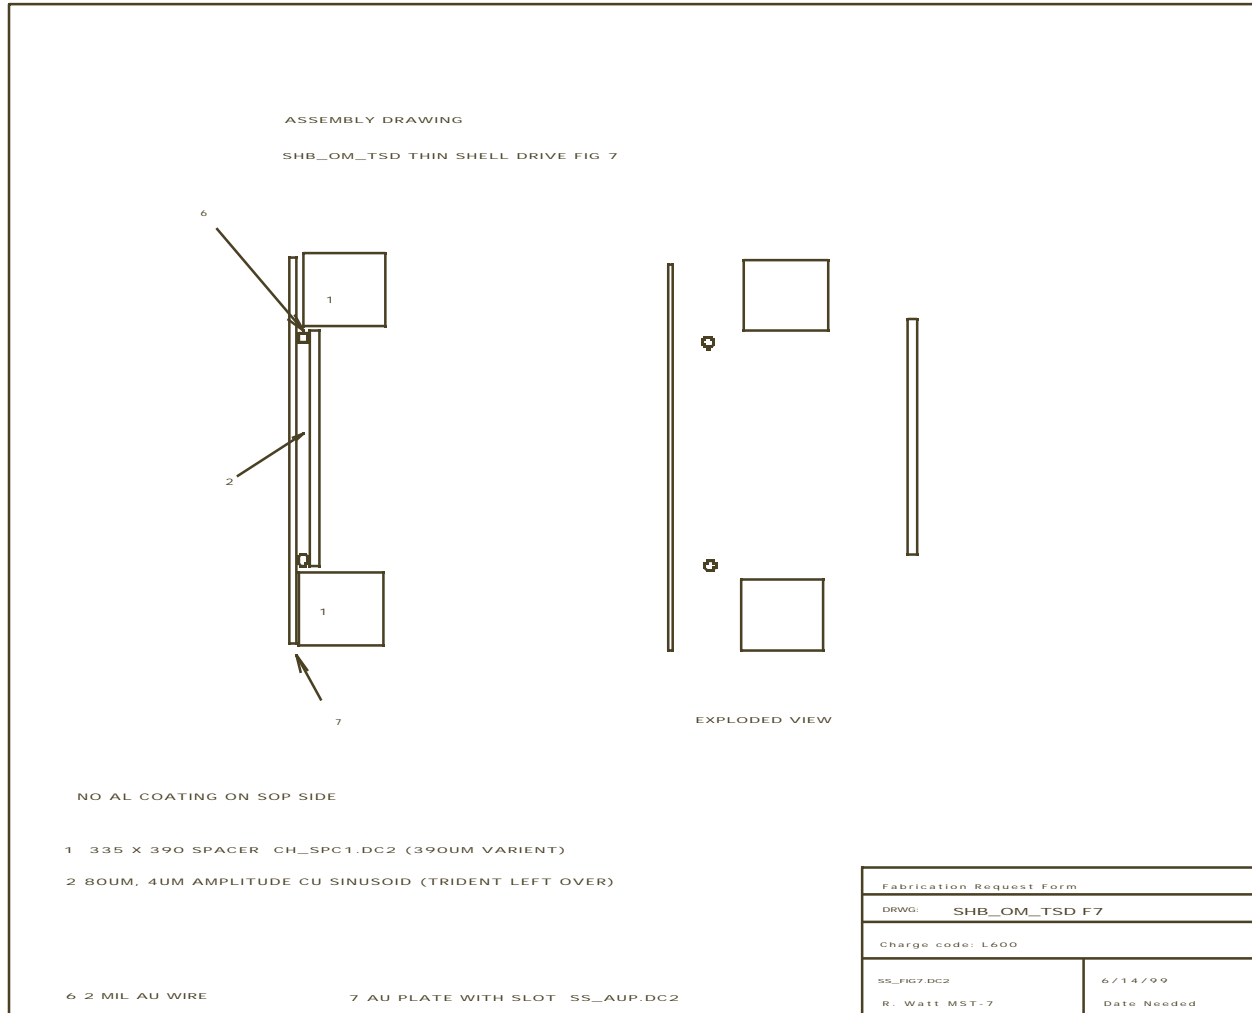


## Structured Shock Experiment – Laser Conditions


1-ns square pulse (SG1011)  
No phase plates  
49 drive beams  
Max energy for all beams  
Tetrahedral hohlraum in H4-H7-H13-H20 configuration  
Ti backlighter for side-on radiography facing Port P6  
Backlighters in two groups of 5  
1.1 ns delay between two groups of backlighters  
Package on not directly facing a port – closest is H14 (TIM 5)  
One beam is not used

### Backlighter beams

<b>Set 1</b>	Day 1 start at 0.0 ns	42, 44, 53, 57, 62
	Day 2 start at 2.2 ns	
<b>Set 2</b>	Days 1 and 2 start at 1.1 ns	45, 47, 40, 51, 69

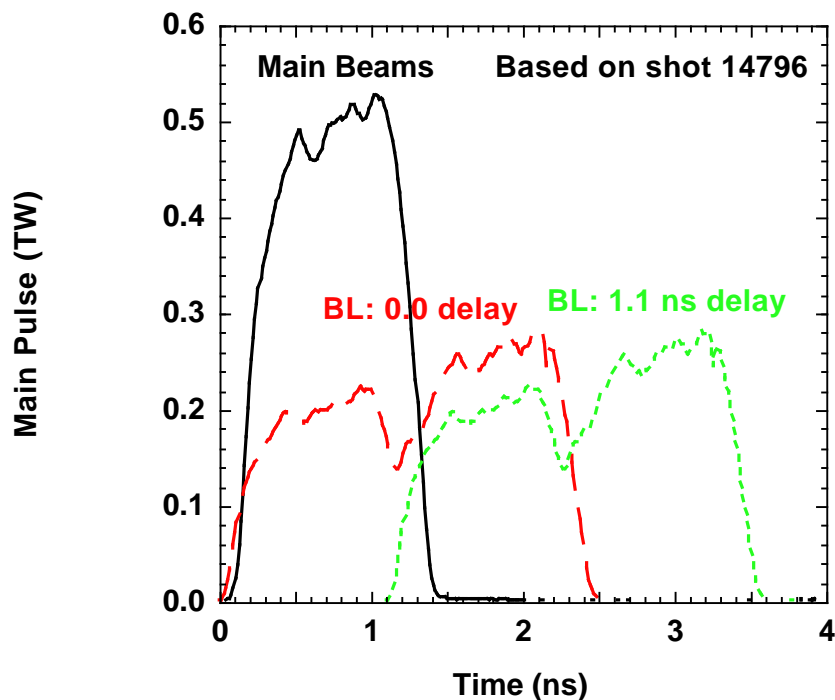

*The backlighter timings for the structured shock experiments. The backlighter timings change between day 1 and day 2.*

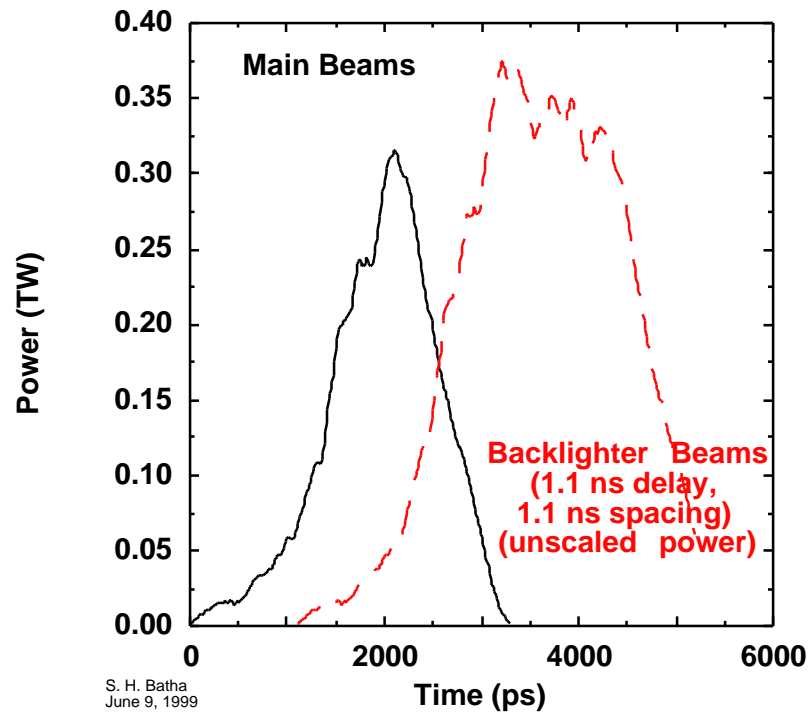

*The Thin-Shell Side-on Radiography shots will use pulse shape 26 with the same backlighter timings as the structured shock experiments.*

0.02 Tetrahedral Pointing Parameters—GAK\_OM (P7 Backlighter)

config: 407

LEH	Port	Theta	Phi
A	4	37.38	234
B	7	79.19	90
C	13	100.8	342
D	20	142.6	198

unit hole vector -- kk z		
X	Y	Z
-0.357	-0.491	0.795
0.000	0.982	0.188
0.934	-0.304	-0.188
-0.577	-0.188	-0.795

Sphere intercept		
1400 μm from TCC		
X	Y	Z
-500	-688	1113
0	1375	263
1308	-425	-263
-808	-263	-1113

LEH center		
1356 μm from TCC		
X	Y	Z
-484	-666	1077
0	1331	254
1266	-411	-254
-783	-254	-1077

"Try4" positions for Scale-1.2 pointing

Cone	Angle
1A	23.20
1B	23.20
2A	47.83
2B	47.83
3	58.79
BL pent cone1	21.41
BL pent cone2	42.02

R(LEH) 350		
X	Y	Z
kk offsets in μm		
525	-45	256
300	80	700
455	20	1035
340	-150	1000
210	-50	1278
42	53	57
40	47	51

3 beam centering		
X	Y	Z
fixes TIM5 view		
300	80	700
fixes Dante view		
320	-150	1000
210	-50	1278

room XYZ are wrong for these

Special backlighter			
X	Y	Z	dist
10 beams toward P7			
-1182	0	4113	3000
-1182	0	4113	3000
-2224	0	3369	3000
-2224	0	3369	3000
-2566	0	2910	3000

6/11/99 10:01		Beam	Beam	Beam	Focus wrt TCC	R retro	RRRmax	Check Sphere	2381	3/16" BB
LEH	Cone	Beam	Theta	Phi	X	Y	Z	theta	phi	ZZZZ
A	1A	55	42.0	198.0	297	-479	159	51	-48	1197
A	1A	46	21.4	270.0	-547	-203	-49	-67	-20	1197
A	1A	48	58.9	246.1	-24	305	500	16	68	1197
A	1B	61	21.4	198.0	-160	-613	430	77	28	714
A	1B	52	58.9	221.9	-55	-187	741	-63	53	714
A	1B	26	42.0	270.0	-533	-232	498	-15	-81	714
A	2A	65	58.9	174.1	15	-752	845	100	24	478
A	2A	17	21.4	342.0	-720	-658	573	-29	-98	478
A	2A	41	81.2	257.5	-403	-115	1050	-70	75	478
OFF	2B	56	21.4	126.0	-508	-745	570	-157	-23	530
A	2B	60	81.2	210.5	-11	-538	921	99	-125	530
A	2B	33	58.9	293.9	-552	-190	893	58	148	530
A	3_	22	21.4	54.0	-595	-733	888	-50	-81	151
A	3_	36	81.2	282.5	-514	-440	1106	-45	84	151
BL	2	40	81.25	185.5	-3435	-947.8	1533.6	-1	0	-2999
B	1A	59	81.2	113.5	522	238	119	-51	48	1197
B	1A	18	98.8	77.5	-324	173	456	67	20	1197
B	1A	13	58.9	77.9	-198	343	-432	-16	-68	1197
B	1B	67	98.8	102.5	231	649	336	-77	-28	714
B	1B	66	58.9	102.1	65	745	-167	63	-53	714
B	1B	24	81.2	66.5	-295	670	225	15	81	714
BL	2	47	81.25	138.5	-2222	3294.6	710.7	1	0	-2999
B	2A	14	121.1	66.1	-196	939	598	29	98	478
B	2A	11	42.0	54.0	-258	1087	-174	70	-75	478
BL	2	69	121.1	113.9	-1042	3678.1	-1297	0	0	-2999
B	2B	68	42.0	126.0	308	1021	-17	-99	125	530
B	2B	32	81.2	41.5	-334	1013	28	-58	-148	530
B	3_	50	138.0	90.0	-50	1216	446	50	81	151
B	3_	20	58.9	30.1	-157	1283	94	45	-84	151
B	3_	58	58.9	149.9	207	1267	179	-95	3	151
C	1A	39	121.1	354.1	265	-295	432	16	68	1197
C	1A	16	98.8	318.5	388	423	-119	51	-48	1197
C	1A	37	81.2	354.5	65	-361	-456	-67	-20	1197
C	1B	21	121.1	329.9	728	-168	167	-63	53	714
C	1B	35	98.8	5.5	546	-488	-225	-15	-81	714
C	1B	15	81.2	329.5	688	19	-336	77	28	714
C	2A	12	138.0	18.0	954	-582	174	-70	75	478
C	2A	34	98.8	293.5	1114	116	-158	100	24	478
C	2A	10	58.9	5.9	833	-476	-598	-29	-98	478
C	2B	29	138.0	306.0	1060	-32	1	88	-142	530
C	2B	27	98.8	30.5	860	-631	-28	58	148	530
C	2B	28	58.9	318.1	876	-257	-552	-157	-23	530
C	3_	38	121.1	282.1	1269	-195	-179	95	-3	151
C	3_	31	42.0	342.0	1141	-423	-446	-50	-81	151
C	3_	23	121.1	41.9	1172	-546	-94	-45	84	151

*ID7-FY99: Structured Shock & Thin Shell*

BL	2	45	158.6	162	-1824	84.232	-3870	0	0	-2999	148.8	-170	-664.8
BL	1	44	121.1	185.9	-3336	-520	-2629	0	0	-3000	135.7	-166.9	-665
D	1A	54	138.0	234.0	-364	431	-159	-51	48	1197	141.2	-152.1	-671
BL	1	62	138.0	162.0	-2693	366	-3306	0	0	-3000	142.4	-174.5	-665
D	1B	64	158.6	234.0	-633	37	-430	-77	-28	714	149.7	-158.2	-666
BL	2	51	121.1	210.1	-3005	-1540	-2629	0	0	-3000	135.7	-157.1	-664.8
D	2A	25	158.6	90.0	-848	-481	-573	29	98	478	154.7	-179.9	-834
BL	1	42	98.8	174.5	-3734	28	-1534	0	0	-2999	127.2	-173.5	-801
D	2A	43	121.1	257.9	-710	247	-845	-100	-24	478	140.1	-138.0	-834
BL	1	57	121.1	138.1	-2693	1462	-2629	-1	0	-2999	138.7	171.0	-801
D	2B	19	158.6	306.0	-866	-253	-570	157	23	530	154.1	-132.5	-775
D	2B	63	98.8	221.5	-515	156	-921	-99	125	530	124.4	-154.8	-775
BL	1	53	98.8	149.5	-3336	1252	-1534	-1	0	-2999	127.8	172.6	-907
D	3_	49	98.8	246.5	-755	-28	-1053	-95	3	151	127.9	-139.3	-945
D	3_	30	158.6	18.0	-881	-339	-888	50	81	151	164.1	-156.7	-945



## Structured Shock Experiment – Diagnostic Settings

<b>Pointing Shot - 1</b>												
<b>Target:</b>	4 mm Au ball at TCC				<b>Laser:</b>	Pulse shape		Main	BL 1	BL 2		
		Backlighter	Package	LEH-D			Energy/Beam UVOT	100	OFF	OFF		
	R	1811	1526	1356			Beams on target	49	OFF	OFF		
	theta	118.3	100.8	143			Total energy on target	4.9 kJ	OFF	OFF		
	phi	227.5	270	198			Backlighter delay	0 ns	OFF	OFF		
TIM	Port	Instrument	Priority	Purpose	Mag.	Pinhole	Filter	Trigger Time	Inter-strip	Bias	Pointing	Notes
1	P3	XRFC2	2	BL spatial uniformity	2x	10 μm	5 mil Be	T0 - 0.4 ns	250 ps	+200 V	Backlighter	
2	H7											
3	H18	SSC1 - Xe nosecone	2	BL time history	NA	200 μm slit	9 mil Be	center 1.2	speed 1	High	Backlighter	Set for Ti
4	P6	XRFC4	1	side-on radiography	2x	10 μm	5 mil Be	T0 - 0.4 ns	250 ps	+100 V	Package	
5	H14	SOP	1	shock breakout	NA	NA	NA	NA	NA		See chart	Absolute timing
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0 - 0.4 ns	250 ps	+100 V	LEH-D	
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA	
	BL 25	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
	BL 30	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA	
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup

<b>Pointing Shot - 2</b>													
<b>Target:</b>	4 mm Au ball at TCC									Main	BL 1	BL 2	
										Pulse shape	1 ns square		
		Backlighter	Package	LEH-D						Energy/Beam UVOT	OFF	100	100
		R	1811	1526	1356					Beams on target	OFF	5	5
		theta	118.3	100.8	143					Total energy on target	OFF	0.5 kJ	0.5 kJ
		phi	227.5	270	198					Backlighter delay	OFF	0.0 ns	1.1 ns
TIM	Port	Instrument	Priority	Purpose	Mag.	Pinhole	Filter	Trigger Time	Inter-strip	Bias	Pointing	Notes	
1	P3	XRFC2	2	BL spatial uniformity	2x	10 μm	5 mil Be	T0-0.4 ns	250 ps	+200 V	Backlighter		
2	H7												
3	H18	SSC1 - Xe nosecone	2	BL time history	200 μm slit	NA	9 mil Be	center 1.2	speed 1	High	Backlighter	Set for Ti	
4	P6	XRFC4	1	side-on radiography	2x	10 μm	5 mil Be	T0-0.4 ns	250 ps	+100 V	Package		
5	H14	SOP	1	shock breakout	NA	NA	NA	NA	NA	NA	See chart	Absolute timing	
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0-0.4 ns	250 ps	+100 V	LEH-D		
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA		
	BL 25	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
	BL 30	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA		
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	

<b>Diagnostic Timing, Double Interface, and Shock Coincidence - Day 1</b>														
<b>Target:</b>		Tetrahedral hohlraum			<b>Laser:</b>			Pulse shape		Main	BL 1	BL 2		
								Energy/Beam UVOT		450 J	450 J	450 J		
		Backlighter			Package	LEH-D			Beams on target		49	5	5	
R		1811			1526	1356			Total energy on target		22 kJ	2.2 kJ	2.2 kJ	
theta		118.3			100.8	143			Backlighter delay		0 ns	0.0 ns	1.1 ns	
phi		227.5			270	198								
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>		
1	P3	XRFC2	2	BL spatial uniformity	6x	10 μm	5 mil Be + 12 μm Ti	T0+0.3 ns	500 ps	+200 V	Backlighter			
2	H7													
3	H18	SSC1 - Xe nosecone	2	BL time history	250 μm slit	NA	9 mil Be	center 1.2	speed 1	High	Backlighter	Set for Ti		
4	P6	XRFC4	1	side-on radiography	8x	10 μm	10 mil Be + 6 μm Ti	T0+0.3 ns	500 ps	+100 V	Package			
5	H14	SOP	1	shock breakout	NA	NA	NA		NA		See chart	Absolute timing		
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0+1.0 ns	500 ps	+100 V	LEH-D			
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA			
	BL 25	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort		
	BL 30	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort		
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA			
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup		

### SOP Absolute Timing - 3

<b>SOP Absolute Timing - 3</b>												
<b>Target:</b>	Au foil facing TIM 5							<b>Laser:</b>	Pulse shape		1 ns square	
	<b>Target placement to be determined</b>								Energy/Beam UVOT		450 J	
									Beams on target		1	
									Total energy on target		0.4 kJ	
									Beamline		<b>41 only!</b>	
									Focus		200 μm in front of foil	
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>
1	P3	XRFC2	OFF									
2	H7											
3	H18	SSC1 - Xe nosecone	OFF									
4	P6	XRFC4	OFF									
5	H14	SOP	1	Absolute timing	NA	NA	NA		NA			Absolute timing
6	P7	XRFC3/SXRFC	OFF									
	H16	Dante	OFF									
	BL 25	Backscatter calorimet	2									
	BL 30	Backscatter calorimet	2									
		p510 laser pulse shape	1									
	P12A	Static pinhole camera	OFF									
	H9C	Static pinhole camera	OFF									
	H8C	Static pinhole camera	OFF									
	H3C	Static pinhole camera	OFF									
	H13C	Static pinhole camera	OFF									
	H12C	Static pinhole camera	OFF									

<b>Double Interface - Day 2</b>													
<b>Target:</b>		Tetrahedral hohlraum						<b>Laser:</b>	Pulse shape		Main	BL 1	BL 2
									Energy/Beam UVOT	450 J	1 ns square		
		Backlighter	Package	LEH-D					Beams on target	49	5	5	
	R	1811	1526	1356					Total energy on target	22 kJ	2.2 kJ	2.2 kJ	
	theta	118.3	100.8	143					Backlighter delay	0 ns	2.2 ns	1.1 ns	
	phi	227.5	270	198									
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>	
1	P3	XRFC2	2	BL spatial uniformity	6x	10 μm	5 mil Be + 12 μm Ti	T0+1.3 ns	500 ps	+200 V	Backlighter		
2	H7												
3	H18	SSC1 - Xe nosecone	2	BL time history	250 μm slit	NA	9 mil Be	center 2.0	speed 1	High	Backlighter	Set for Ti	
4	P6	XRFC4	1	side-on radiography	8x	10 μm	10 mil Be + 6 μm Ti	T0+1.3 ns	500 ps	+100 V	Package		
5	H14	SOP	1	shock breakout	NA	NA	NA		NA		See chart	Absolute timing	
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0+2.5 ns	500 ps	+100 V	LEH-D		
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA		
	BL 25	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
	BL 30	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA		
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	

<b>Thin Shell Side-On Radiography - Day 2</b>												
									Main	BL 1	BL 2	
<b>Target:</b>	Tetrahedral hohlraum					<b>Laser:</b>	Pulse shape			PS26		
		Backlighter	Package	LEH-D			Energy/Beam UVOT	450 J	450 J	450 J		
	R	1811	1526	1356			Beams on target	49	5	5		
	theta	118.3	100.8	143			Total energy on target	22 kJ	2.2 kJ	2.2 kJ		
	phi	227.5	270	198			Backlighter delay	0 ns	2.2 ns	1.1 ns		
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>
1	P3	XRFC2	2	BL spatial uniformity	6x	10 μm	5 mil Be + 12 μm Ti	T0+1.3 ns	500 ps	+200 V	Backlighter	
2	H7											
3	H18	SSC1 - Xe nosecone	2	BL time history	250 μm slit	NA	9 mil Be	center 2.0	speed 1	High	Backlighter	Set for Ti
4	P6	SSC4 - SMP20x snout	1	foil motion	250 μm slit	10 μm	4 mil Be	center 3.5	speed 1	High	Package	
5	H14	SOP	1	shock breakout	NA	NA	NA		NA		See chart	Absolute timing
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0+2.5 ns	500 ps	+100 V	LEH-D	
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA	
	BL 25	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
	BL 30	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA	
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup

<b>Radial Shock Motion</b>												
										Main	BL 1	BL 2
<b>Target:</b>	Radial Shock Motion Target					<b>Laser:</b>	Pulse shape			1 ns square		
		Backlighter	Package	LEH-D			Energy/Beam UVOT			450 J	OFF	OFF
		R	1811	1526	1356		Beams on target			49	OFF	OFF
		theta	118.3	100.8	143		Total energy on target			22 kJ	OFF	OFF
		phi	227.5	270	198		Backlighter delay			0 ns	OFF	OFF
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>
1	P3	XRFC2	OFF									
2	H7											
3	H18	SSC1 - Xe nosecone	OFF									
4	P6	XRFC4	OFF									
5	H14	SOP	1	shock breakout	NA	NA	NA		NA		See chart	Shock motion
6	P7	XRFC3/SXRFC	2	hole closure	3x	25/10/25	standard	T0+2.5 ns	500 ps	+100 V	LEH-D	Late time h expansion
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA	
	BL 25	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
	BL 30	Backscatter calorimet	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA	
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup


## Structured Shock Experiment – SOP Pointing & Focusing

	<b>Day 1</b>	<b>Focus from TCC (<math>\mu\text{m}</math>)</b>	<b>Move Left from TCC/SOP LOS (<math>\mu\text{m}</math>)</b>	<b>Move Down from TCC/SOP LOS (<math>\mu\text{m}</math>)</b>
<b>1</b>	<b>Pointing - Sphere/SOP</b>	Nominal	Nominal	Nominal
<b>2</b>	<b>Pointing - Sphere - ba</b>	Nominal	Nominal	Nominal
<b>3</b>	<b>SOP Absolute Timing</b>	Nominal	Nominal	Nominal
<b>4</b>	<b>Diag Timing - SOP Re</b>	1709	286	168
<b>5</b>	<b>Diag Timing* - SOP Re</b>	1709	286	168
<b>6</b>	<b>Double Interface-T</b>	1786	299	176
<b>7</b>	<b>Double Interface-U</b>	1709	286	168
<b>8</b>	<b>Shock Coincidence</b>	1638	274	161
<b>9</b>	<b>Shock Coincidence</b>	1638	274	161
<b>10</b>	<b>Double Interface-T</b>	1786	299	176
<b>11</b>	<b>Double Interface-U</b>	1709	286	168
<b>12</b>	<b>Shock Coincidence</b>	1638	274	161
<b>13</b>	<b>Repeat Double Interface</b>			
	<b>Day 2</b>			
<b>14</b>	<b>Diag Timing* - SOP Re</b>	1709	286	168
<b>15</b>	<b>Double Interface-T</b>	1786	299	176
<b>16</b>	<b>Double Interface-U</b>	1709	286	168
<b>17</b>	<b>Radial Shock Motion</b>	1457	244	143
<b>18</b>	<b>Radial Shock Motion</b>	1457	244	143
<b>19</b>	<b>Double Interface-T</b>	1786	299	176
<b>20</b>	<b>Double Interface-U</b>	1709	286	168
<b>21</b>	<b>Radial Shock Motion</b>	1457	244	143
<b>22</b>	<b>Radial Shock Motion*</b>	1457	244	143
<b>23</b>	<b>Side-on Thin Shell</b>	1840	308	181
<b>24</b>	<b>Side-on Thin Shell</b>	1840	308	181
<b>25</b>	<b>Side-on Thin Shell*</b>	1840	308	181
	<b>NOTE: package is tilted 30.45 degrees counter clockwise (CCW) from the vertical</b>			




# Structured Shock Experiment – Colorful Views


60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400 $\mu$ m, rLEH=350 $\mu$ m June 99 fixes  
P3 theta 63.44  $\phi$  126 -.5257 .7236 .4472 TIM#1  
side=beam1238

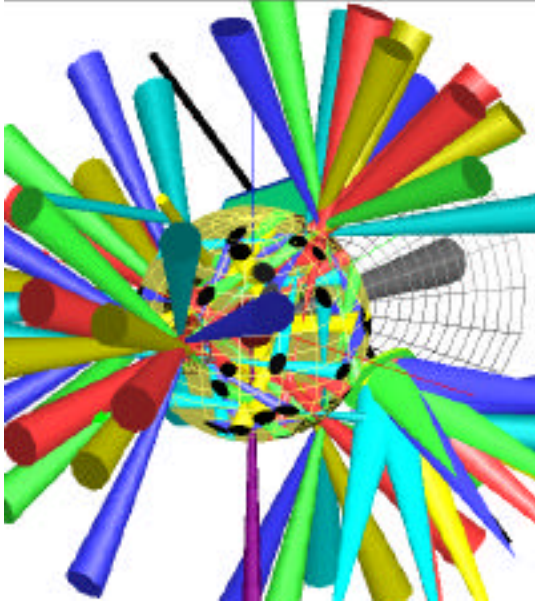

60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400 $\mu$ m, rLEH=350 $\mu$ m June 99 fixes  
P6 theta 63.44  $\phi$  342 -.8507 -.2764 .4472 TIM#4  
side=beam1234

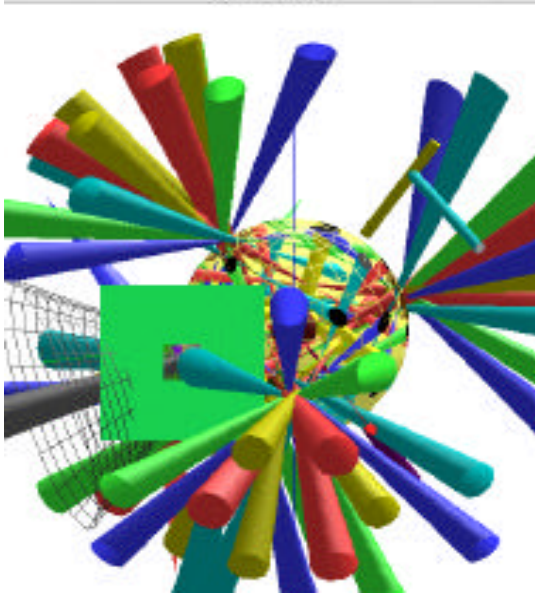


60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400 $\mu$ m, rLEH=350 $\mu$ m June 99 fixes  
P1 theta 0.  $\phi$  0 Top of machine  
side=beam1238

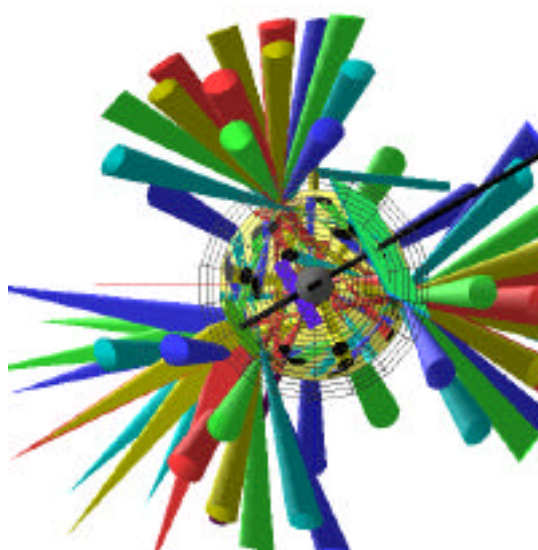

*TIM 5 (not top of machine)*

60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400 $\mu$ m, rLEH=350 $\mu$ m June 99 fixes  
P7 theta 116.57  $\phi$  162 -.8507 .2764 -.4472 TIM#6  
side=beam1238

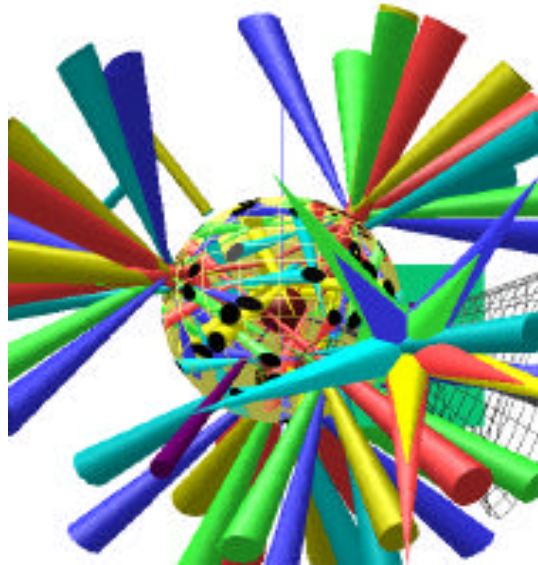

## ***Thin Shell Rayleigh-Taylor Experiment – Goals***

**Principal Investigators: Gottfried T. Schappert and Steve Batha, LANL P-24**

**Theory: Dave Hollowell and Rod Mason, LANL X-Div**

The objective of this experiment is to compare the classical material pressure-driven RT instability with the purely ablative-driven RT instability. The experiment compares the RT growth in two types of targets. The tamped packages consist of a copper foil with 45  $\mu\text{m}$  wavelength, 0.5  $\mu\text{m}$  amplitude corrugations on top and is overcoated with a layer of Be. The untamped package consists of the same copper foil with the same Be layer set 200  $\mu\text{m}$  above the copper.


Both packages are mounted on a tetrahedral hohlraum, driven by hohlraum radiation and face-on radiographed using a 6.7 keV iron backlighter. The Cu foil in the tamped package is driven by the Be filtered drive plus the Be material pressure, whereas the untamped package experiences only the Be filtered drive. Hence, the difference in drive is only the material pressure generated from the Be.

### Thin Shell Rayleigh-Taylor Experiment – Target Designs

GTS\_OM\_Tar\_1\_no-cone  
CROSS SECTIONAL VIEW  
R-T 45 Drive Beams, 12 B-lighter

**Figure - 9**

AU	1.5mg
Fe	.07mg
Cu	.07mg
plastic	3.0mg

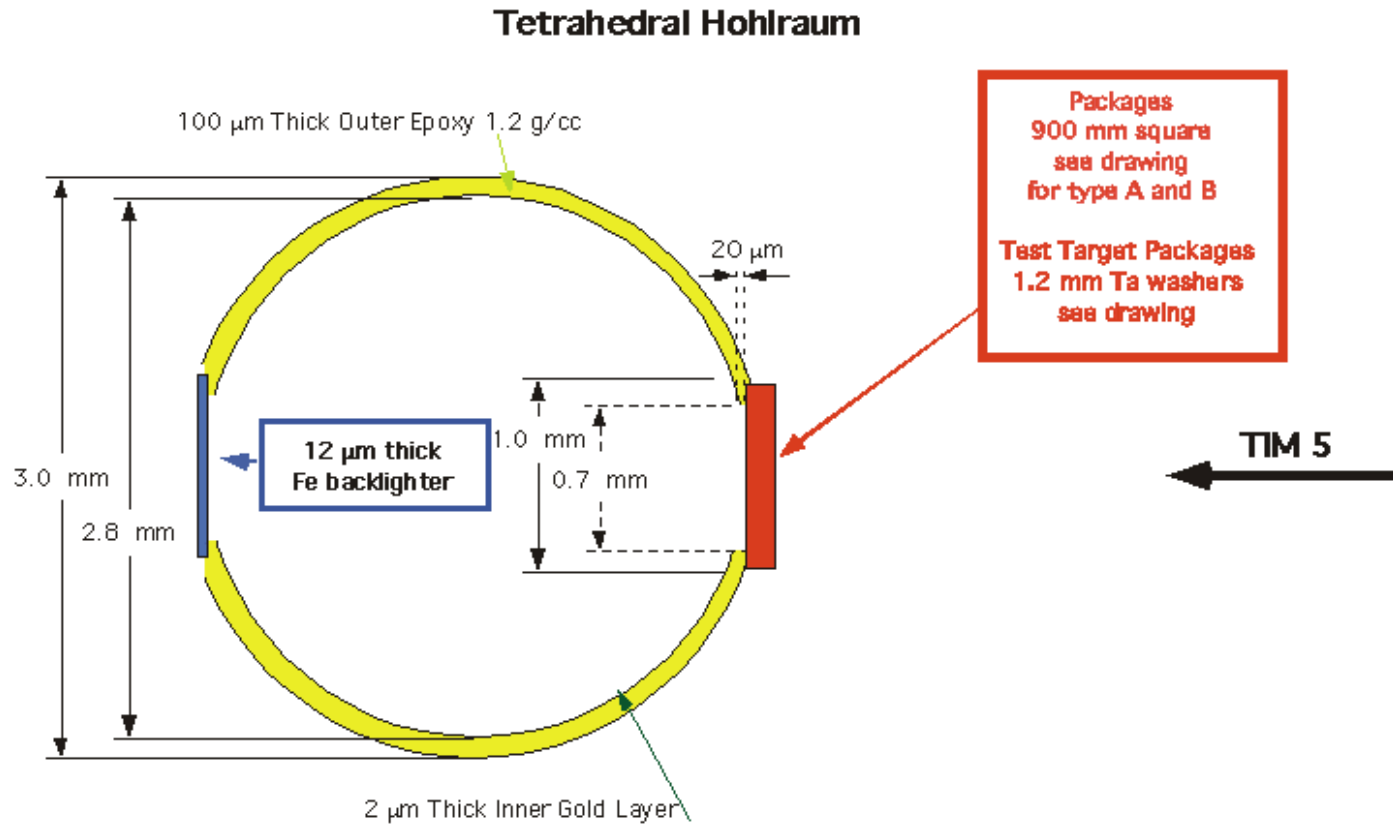


GTS\_OM\_T

**Test Target Packages**

*NOT ALL TO SCALE*

**Figure - 10**

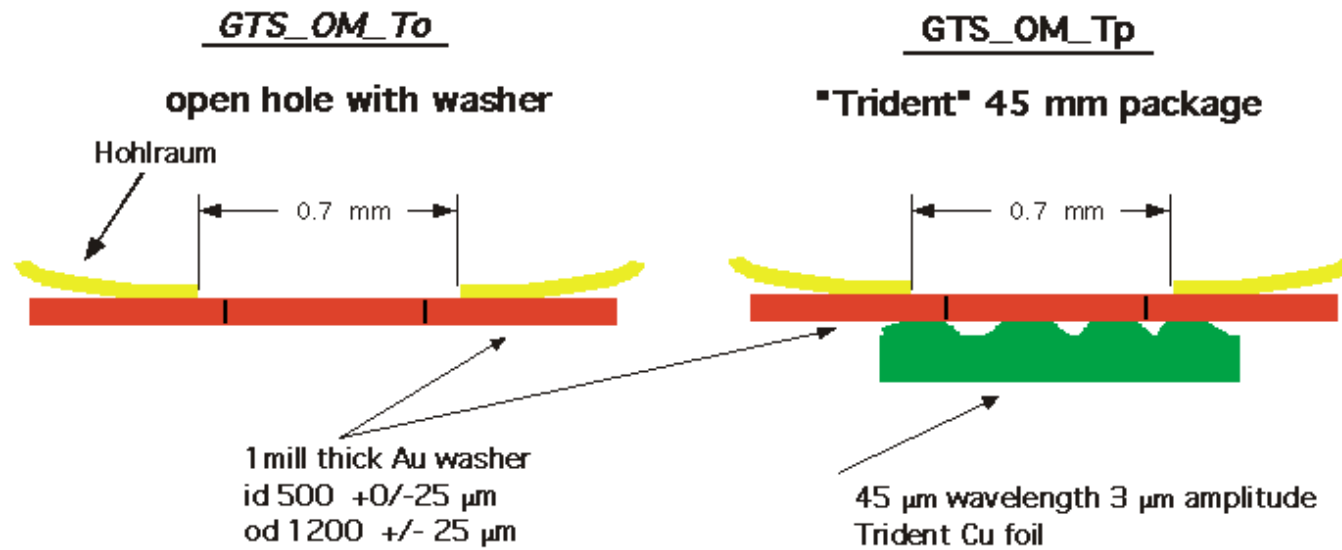

GTS\_OM\_To

open hole with washer

Hohlraum

0.7 mm

1 mill thick Au washer  
id 500 +0/-25  $\mu\text{m}$   
od 1200 +/- 25  $\mu\text{m}$

GTS\_OM\_Tp

"Trident" 45 mm package

0.7 mm

45  $\mu\text{m}$  wavelength 3  $\mu\text{m}$  amplitude  
Trident Cu foil

new stem for H2 insertion

Note:  
When mounting packages on H14 LEH,  
corrugations should run perpendicular  
to target support stem.




GTS\_OM\_Tar\_3p  
March 26, 1999


GTS\_OM\_Tar\_2p  
Packages

Figure - 11

*NOT ALL TO SCALE*

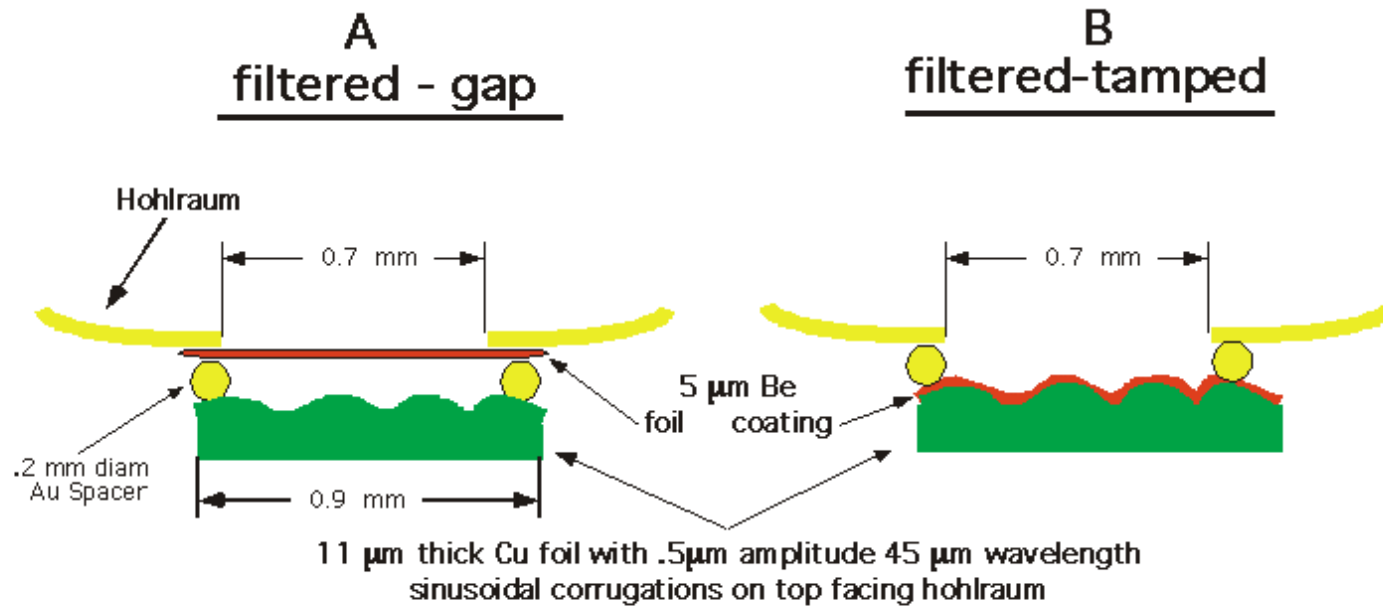

Note:  
When mounting packages on H14 LEH,  
corrugations should run perpendicular  
to target support stem.

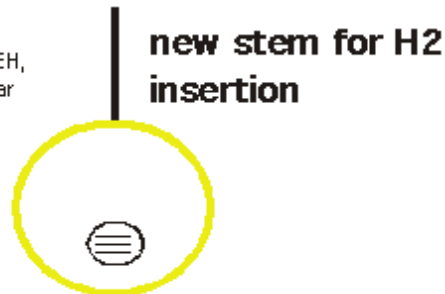

GTS\_OM\_Tar\_2p  
March 26, 99

## ***Thin Shell Rayleigh-Taylor Experiment – Laser Conditions***


Pulse shape 26  
No phase plates  
45 drive beams  
Max energy for all beams  
Tetrahedral hohlraum in H4-H7-H13-H20 configuration  
Fe backlighter flush on H7 target LEH  
Backlighters in two groups of 6  
1.4 ns delay between two groups of backlighters  
Package on H14  
Three beams are not used

Backlighter beams are 1A and 2B for one and 1B and 2A for the other. Two six-leaf clovers rotated 60 degrees are formed. This pattern will not be smooth with PS26.

Backlighter on H-7 Fe disk  
Delay 2 groups of beams relative to each other to produce approx. 3 ns long pulse.  
Each beam is PS 26.

<b>Delay 2.5 ns</b>		<b>Delay 3.9 ns</b>	
Cone 1A Beams	59	Cone 1B Beams	67
	18		66
	13		24
Cone 2B	69	Cone 2A	47
	68		14
	32		11

Beams 50, 20, and 58 not used

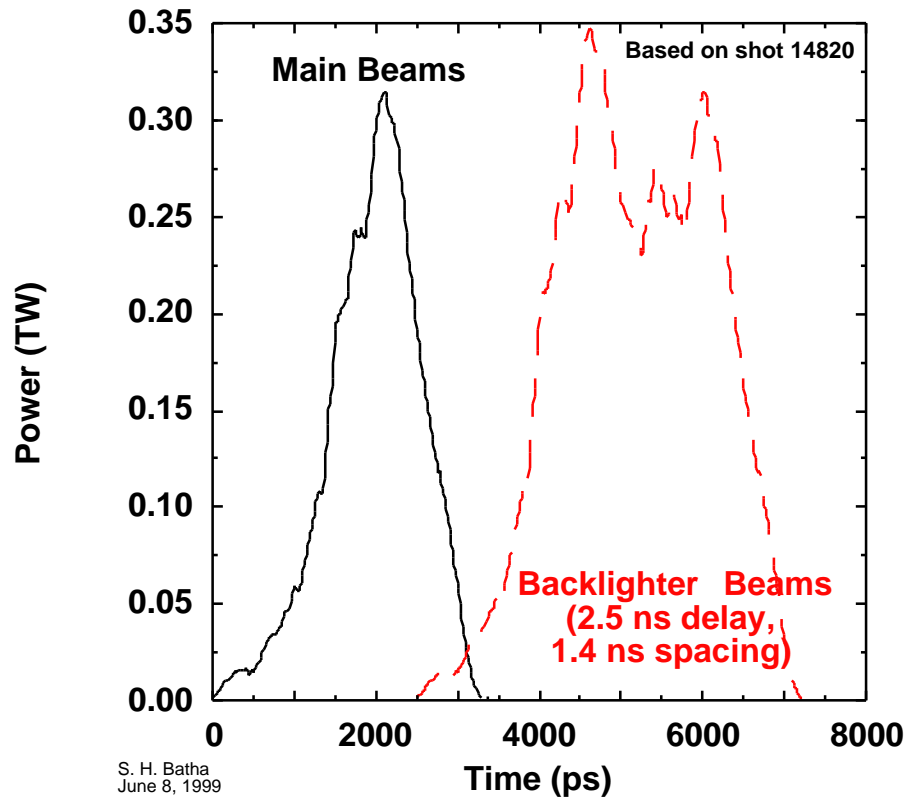

Timing for main pulse and sum of backlighter beams based on December 1998 experience. The Power axis is somewhat arbitrary in this graph.

0.02 Tetrahedral Pointing Parameters—GTS\_OM (LEH-B Backlighter)

config: 407

LEH	Port	Theta	Phi
A	4	37.38	234
B	7	79.19	90
C	13	100.8	342
D	20	142.6	198

unit hole vector -- kk z		
X	Y	Z
-0.357	-0.491	0.795
0.000	0.982	0.188
0.934	-0.304	-0.188
-0.577	-0.188	-0.795

Sphere intercept		
1400 μm from TCC		
X	Y	Z
-500	-688	1113
0	1375	263
1308	-425	-263
-808	-263	-1113

LEH center		
1356 μm from TCC		
X	Y	Z
-484	-666	1077
0	1331	254
1266	-411	-254
-783	-254	-1077

"Try4" positions for Scale-1.2 pointing

Cone	Angle
1A	23.20
1B	23.20
2A	47.83
2B	47.83
3	58.79

R(LEH) 350		
X	Y	Z
kk offsets in μm		
525	-45	256
300	80	700
455	20	1035
340	-150	1000
210	-50	1278

3 beam centering		
X	Y	Z
fixes TIM5 view		
300	80	700
fixes Dante view		
320	-150	1000
210	-50	1278

LEH-B settings			
Special backlighter			
X	Y	Z	dist
Cross LEH center			
-1182	0	4113	3000
-1182	0	4113	3000
-2224	0	3369	3000
-2224	0	3369	3000
-2566	0	2910	3000

R retro	RRRmax	2381	3/16" BB
1356	166.8	1984	5/32" BB

6/11/99 10:21	LEH	Cone	Beam	Beam Theta	Beam Phi	kk y	Focus wrt TCC			Retro	Dead	Recon	Offset	Check Sphere		
							X	Y	Z	XXX	YYY	ZZZ	theta	phi	ZZZZ focus	
A	1A	55	42.0	198.0	297	-479	159	51	-48	1197	38.8	-135.9	-671			
A	1A	46	21.4	270.0	-547	-203	-49	-67	-20	1197	31.6	-121.7	-671			
A	1A	48	58.9	246.1	-24	305	500	16	68	1197	42.4	-120.2	-671			
A	1B	61	21.4	198.0	-160	-613	430	77	28	714	30.3	-129.8	-666			
A	1B	52	58.9	221.9	-55	-187	741	-63	53	714	42.9	-133.7	-666			
A	1B	26	42.0	270.0	-533	-232	498	-15	-81	714	39.9	-114.8	-666			
A	2A	65	58.9	174.1	15	-752	845	100	24	478	39.9	-150.0	-834			
A	2A	17	21.4	342.0	-720	-658	573	-29	-98	478	25.3	-108.1	-834			
A	2A	41	81.2	257.5	-403	-115	1050	-70	75	478	51.0	-116.4	-834			
A	2B	56	21.4	126.0	-508	-745	570	-157	-23	530	25.9	-155.5	-775			
A	2B	60	81.2	210.5	-11	-538	921	99	-125	530	55.6	-133.2	-775			
A	2B	33	58.9	293.9	-552	-190	893	58	148	530	37.8	-94.6	-775			
A	3_	22	21.4	54.0	-595	-733	888	-50	-81	151	15.9	-131.3	-945			
A	3_	36	81.2	282.5	-514	-440	1106	-45	84	151	50.1	-100.5	-945			
A	3_	40	81.2	185.5	-260	-710	1053	95	-3	151	52.1	-148.7	-945			
BL	1A	59	81.2	113.5	-1180	4051	711	0	0	-2999	79.7	97.7	-665			
BL	1A	18	98.8	77.5	644	4226	-202	0	0	-2999	85.6	85.9	-665			
BL	1A	13	58.9	77.9	537	3842	1806	0	0	-2999	72.4	86.4	-665			
BL	1B	67	98.8	102.5	-644	4226	-202	0	0	-3000	85.6	94.1	-665			
BL	1B	66	58.9	102.1	-537	3842	1806	0	0	-3000	72.4	93.6	-665			
BL	1B	24	81.2	66.5	1180	4051	711	0	0	-3000	79.7	82.3	-665			
BL	2A	47	81.2	138.5	-2222	3295	711	1	0	-2999	79.1	107.7	-801			
BL	2A	14	121.1	66.1	1042	3678	-1297	0	0	-2999	94.6	81.9	-801			
BL	2A	11	42.0	54.0	1180	2956	2483	0	0	-2999	64.7	79.9	-801			
BL	2B	69	121.1	113.9	-1042	3678	-1297	0	0	-2999	94.6	98.1	-801			
BL	2B	68	42.0	126.0	-1180	2956	2483	0	0	-2999	64.7	100.1	-801			
BL	2B	32	81.2	41.5	2222	3295	711	-1	0	-2999	79.1	72.3	-801			
OFF	3_	50	138.0	90.0												
OFF	3_	20	58.9	30.1												
OFF	3_	58	58.9	149.9												
C	1A	39	121.1	354.1	265	-295	432	16	68	1197	105.6	-13.9	-671			
C	1A	16	98.8	318.5	388	423	-119	51	-48	1197	101.7	-24.3	-671			
C	1A	37	81.2	354.5	65	-361	-456	-67	-20	1197	95.0	-15.8	-671			
C	1B	21	121.1	329.9	728	-168	167	-63	53	714	106.0	-23.5	-666			
C	1B	35	98.8	5.5	546	-488	-225	-15	-81	714	102.7	-10.7	-666			
C	1B	15	81.2	329.5	688	19	-336	77	28	714	93.6	-19.9	-666			
C	2A	12	138.0	18.0	954	-582	174	-70	75	478	113.8	-9.8	-834			
C	2A	34	98.8	293.5	1114	116	-158	100	24	478	100.4	-33.4	-834			
C	2A	10	58.9	5.9	833	-476	-598	-29	-98	478	87.7	-10.5	-834			
C	2B	29	138.0	306.0	1060	-32	1	88	-142	530	119.1	-25.1	-768			
C	2B	27	98.8	30.5	860	-631	-28	58	148	530	96.6	0.7	-775			
C	2B	28	58.9	318.1	876	-257	-552	-157	-23	530	86.4	-30.4	-775			
C	3_	38	121.1	282.1	1269	-195	-179	95	-3	151	112.1	-37.2	-945			
C	3_	31	42.0	342.0	1141	-423	-446	-50	-81	151	79.3	-19.5	-945			
C	3_	23	121.1	41.9	1172	-546	-94	-45	84	151	109.5	2.5	-945			



*ID7-FY99: Structured Shock & Thin Shell*

D	1A	45	158.6	162.0	-362	-458	49	67	20	1197	148.4	-166.3	-671
D	1A	44	121.1	185.9	282	-117	-500	-16	-68	1197	137.6	-167.8	-671
D	1A	54	138.0	234.0	-364	431	-159	-51	48	1197	141.2	-152.1	-671
D	1B	62	138.0	162.0	-385	-436	-498	15	81	714	140.1	-173.2	-666
D	1B	64	158.6	234.0	-633	37	-430	-77	-28	714	149.7	-158.2	-666
D	1B	51	121.1	210.1	-195	5	-741	63	-53	714	137.1	-154.3	-666
D	2A	25	158.6	90.0	-848	-481	-573	29	98	478	154.7	-179.9	-834
D	2A	42	98.8	174.5	-234	-348	-1050	70	-75	478	129.0	-171.6	-834
D	2A	43	121.1	257.9	-710	247	-845	-100	-24	478	140.1	-138.0	-834
D	2B	57	121.1	138.1	-351	-466	-893	-58	-148	530	142.2	166.6	-775
D	2B	19	158.6	306.0	-866	-253	-570	157	23	530	154.1	-132.5	-775
D	2B	63	98.8	221.5	-515	156	-921	-99	125	530	124.4	-154.8	-775
D	3_	53	98.8	149.5	-577	-353	-1106	45	-84	151	129.9	172.5	-945
D	3_	49	98.8	246.5	-755	-28	-1053	-95	3	151	127.9	-139.3	-945
D	3_	30	158.6	18.0	-881	-339	-888	50	81	151	164.1	-156.7	-945

## Thin Shell Rayleigh-Taylor Experiment – Diagnostic Settings


<b>Thin Shell Pointing Shot - 1</b>													
<b>Target:</b>	4 mm Au ball at TCC									Main	BL 1	BL 2	
									<b>Laser:</b>	Pulse shape	1 ns square		
										Energy/Beam UVOT	100 J	100 J	100 J
		Backlighter - H7	Package - H14							Beams on target	45	6	6
	R	1470	1670							Total energy on target	4.5 kJ	0.6 kJ	0.6 kJ
	Theta	79.2	100.8							Backlighter delay		2.5	3.9
	Phi	90	270										
TIM	Port	Instrument	Priority	Purpose	Mag.	Pinhole	Filter	Trigger Time	Inter-strip	Bias	Pointing	Notes	
1.0	P3	SSC1- Fe Snout	2.0	BL temporal history	NA	330 $\mu$ m slit	8 mil Be + 1/2 mil Fe	center TO	speed 1	High	Backlighter		
2	H7	XRFC2	2	BL spatial uniformity	2x	10 $\mu$ m	5 mil Be	TO-0.4 ns	250 ps	+ 200 V	Backlighter		
5	H14	XRFC4	1	Face-on Radiography	2x	10 $\mu$ m	5 mil Be	TO-0.4 ns	250 ps	+100 V	Package		
	H16	Dante	OFF	drive	NA	NA	NA	NA	NA	NA	NA		
	BL 25	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
	BL 30	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA		
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	

<b>Thin Shell Diagnostic Timing and Alignment Check - 2, 3</b>												
										Main	BL 1	BL 2
<b>Target:</b>	Tetrahedral hohlraum								<b>Laser:</b>	Pulse shape		PS26
		Backlighter - H7	Package - H14						Energy/Beam UVOT	OFF	375 J	375 J
									Beams on target	OFF	6	6
	R	1470	1670						Total energy on target	OFF	2.2 kJ	2.2 kJ
	Theta	79.2	100.8						Backlighter delay	OFF	2.5	3.9
	Phi	90	270									
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>
1	P3	SSC1- Fe Snout	2	BL temporal history	NA	330 μm slit	8 mil Be + 1/2 mil Fe	center 5.0	speed 1	High	Backlighter	
2	H7	XRFC2	2	BL spatial uniformity	6x	10 μm	5 mil Be + 1/2 mil Fe	T0+3.0 ns	250 ps	+200 V	Backlighter	
5	H14	XRFC4	1	Face-on Radiography	12x	10 μm	5 mil Be + 1/2 mil Fe	T0+3.0 ns	250 ps	+100 V	Package	
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA	
	BL 25	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
	BL 30	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA	
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup


<b>Thin Shell Rayleigh-Taylor Shots - 4 to 12</b>													
<b>Target:</b>		Tetrahedral hohlraum								Main	BL 1	BL 2	
										Pulse shape	PS 26		
		Backlighter - H7	Package - H14							Energy/Beam UVOT	375 J	375 J	375 J
										Beams on target	45	6	6
	R	1470	1670							Total energy on target	17 kJ	2.2 kJ	2.2 kJ
	Theta	79.2	100.8							Backlighter delay	0 ns	2.5	3.9
	Phi	90	270										
<b>TIM</b>	<b>Port</b>	<b>Instrument</b>	<b>Priority</b>	<b>Purpose</b>	<b>Mag.</b>	<b>Pinhole</b>	<b>Filter</b>	<b>Trigger Time</b>	<b>Inter-strip</b>	<b>Bias</b>	<b>Pointing</b>	<b>Notes</b>	
1	P3	SSC1- Fe Snout	2	BL temporal history	NA	330 μm slit	8 mil Be + 1/2 mil Fe	center 5.0	speed 1	High	Backlighter		
2	H7	XRFC2	2	BL spatial uniformity	6x	10 μm	5 mil Be + 1/2 mil Fe	T0+4.0 ns	500 ps	+200 V	Backlighter	confirm trigger times with PI before each shot	
5	H14	XRFC4	1	Face-on Radiography	12x	10 μm	5 mil Be + 1/2 mil Fe	T0+4.0 ns	500 ps	+100 V	Package	confirm trigger times with PI before each shot	
	H16	Dante	2	drive	NA	NA	NA	NA	NA	NA	NA		
	BL 25	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
	BL 30	Backscatter calorimetry	2	drive	NA	NA	NA	NA	NA	NA	NA	streaks if no effort	
		p510 laser pulse shape	1	drive	NA	NA	NA	NA	NA	NA	NA		
	P12A	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H9C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H8C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H3C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H13C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	
	H12C	Static pinhole camera	2	beam pointing, etc.	4x	single	6 mil Be	NA	NA	NA	Standard	Standard setup	

# Thin Shell Rayleigh-Taylor Experiment – Colorful Views


60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400µm, rLEH=350µm June 99 fixes  
P3 theta 63.44 ø 126 -.5257 .7236 .4472 TIM#1  
face-beams13d

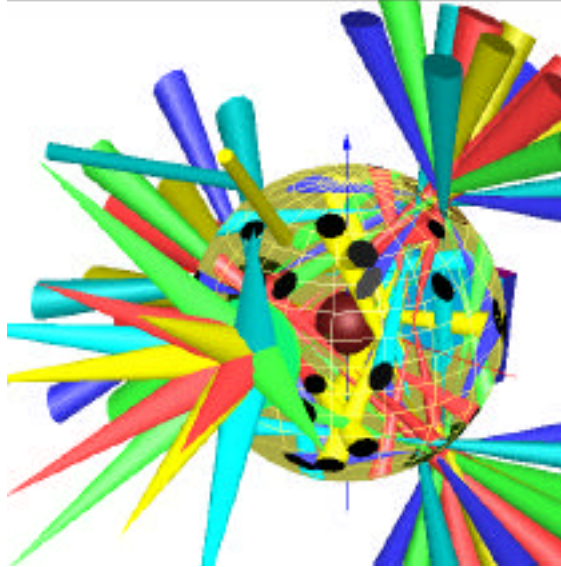


60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400µm, rLEH=350µm June 99 fixes  
H7 theta 79.19 ø 90 .0000 .9822 .1876 TIM#2 CS  
face-beams13d

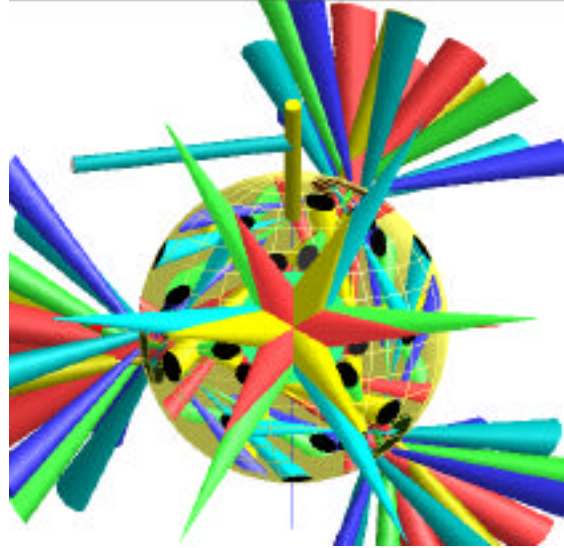

60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400µm, rLEH=350µm June 99 fixes  
H161 theta 142.62 ø 126 -.3468 .4911 -.7947 Dante  
face-beams13d

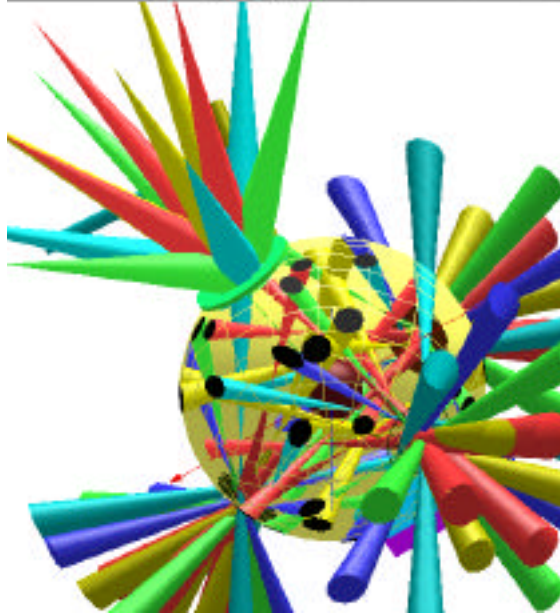

60-beam Omega Laser, Tetrahedral H4-H7-H13-H20  
Rsphere=1400µm, rLEH=350µm June 99 fixes  
H14 theta 100.81 ø 270 .0000 -.9822 -.1876 TIM#5 SOP  
face-beams13d

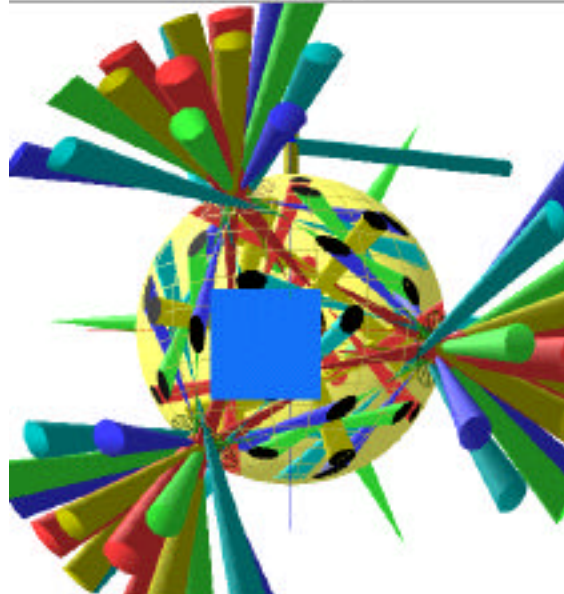

## ***Contact List of Key Personnel***

### ***LANL Personnel***

P-24 Group Office (505) 667-4879  
P-24 Fax (505) 665-4409  
Juan Fernandez (505) 667-6575  
Kurt Schoenberg (505) 667-1512

### ***LLE Personnel***

Reception (716) 275-5101  
LLE Fax (716) 256-5286  
Jean Steve (Administrative Liason, NLUF)  
-5286  
Tom Boehly -0254  
David Bradley -5769  
Paul Jaanamagi -5515  
Jim Knauer -2074  
David Meyerhofer -0255  
Sam Morse -9672  
Greg Pien -5848  
Bob Rombaut -9191  
Wolf Seka -3815  
John Soures -3866  
Keith Thorp -7603  
Ray Bahr -9443

### ***Area Hotels***

Marriott Courtyard Brighton (716) 292-1000  
Marriott Residence Inn (716) 272-8850  
Marriott Thruway (716) 359-1800  
Hampton Inn (716) 272-7800

## Map of LLE and Environs

Directions to the  
Laboratory for  
Laser Energetics

250 E. River Rd.  
Rochester, NY  
(716) 275-5101  
FAX (716) 275-5960

