

LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

LA-UR--89-2686

DE89 016591

TITLE INVERSED SIMULATION OF A SHEARED SLICK

AUTHORS Vincent Thomas and Dan Winske

SUBMITTED TO 15th Workshop on the Numerical Simulation of Plasmas, Santa Fe, NM, Aug. 17-20, 1989

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

This report is available to the public through the University of California, Los Alamos, 7050 La Jolla Village Drive, San Diego, CA 92161. For information on obtaining copies for private use, contact the University of California, Los Alamos, 7050 La Jolla Village Drive, San Diego, CA 92161.

This report is available to the public through the University of California, Los Alamos, 7050 La Jolla Village Drive, San Diego, CA 92161. For information on obtaining copies for private use, contact the University of California, Los Alamos, 7050 La Jolla Village Drive, San Diego, CA 92161.

Los Alamos National Laboratory
Los Alamos, New Mexico 87545

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

5/89



Hybrid Simulations of a Curved Shock

V. A. Thomas and D. Winske

Los Alamos National Laboratory

Calculations of supersonic flow past magnetized and unmagnetized objects have been used to model the properties of shock waves associated with the flow of solar wind past the planets. Such calculations have been performed both in the fluid limit (Spreiter and Stahara, 1985) and in the MHD limit (Walker and Ogino, 1989 and the references therein) in both two and three dimensions.

Even though such calculations do give some properties of the interaction, the basic shock dissipation mechanisms are not retained. On the other hand, idealized planar calculations have been performed with full particle codes and hybrid (particle ions and massless fluid electrons) codes to examine the shock dissipation processes. For the usual planetary case of supercritical flow relative to the Alfvén velocity ($V_{flow} > 3V_A$), the dissipation mechanism involves the reflection of part of the incoming ion population, a process well modeled by hybrid simulations. Hybrid simulations of planar shock waves have also yielded much information concerning the electromagnetic field structure of the shock. (Goodrich, 1985).

Unfortunately, the planar calculations do not include all of the processes thought to be important in the global structure of the bow shock. Among these processes are the nonlocal transport of reflected ions through the shock, and the question of which ions make up the fore-shock population, i.e., those ions that travel back up stream into the solar wind from the quasi-parallel portion of the shock. To answer the question, a self-consistent approach that includes ion kinetic phenomena together with global shock phenomena is needed. Here we attempt to examine

these issues by performing large scale hybrid simulations of a curved shock in two dimensions.

Many algorithms are available for solving the electromagnetic fields in hybrid codes in 2-D, e.g., Harned (1982), Terasawa (1986), and Quest (1989). The method we use is an adaptation of the later two methods. The difference between the methods is the manner in which J_i^{n+1} is calculated from B^{n+1} , $J_i^{n+1/2}$, and $E^{n+1/2}$, where J_i is the ion current density, B is the magnetic field, E is the electric field, and the superscript n is the time step level. In Terasawa's method, a second order Runge Kutta integration is used to predict the desired quantity; repeated iteration is possible, if desired. In Quest's approach, the fluid equations are used to calculate the desired quantity. Using the fluid equations yields an algorithm that is more robust than that of Terasawa. Unfortunately, the algorithm requires separate fluid equation predictions for each species, and the form of the required equations is complicated if more than one charge to mass ratio is being simulated. Another approach is to extrapolate J_i^{n+1} from its value at the previous time step and previous half time step. Many properties of this algorithm are satisfactory, including the possibility of including species with different charge to mass ratios. We performed the global hybrid simulations using this method.

For the initial calculations, we chose a two dimensional model with the ambient magnetic field in the plane of the simulation, making an angle of 60° with respect to the incoming flow velocity. Only the front edge of the spherical obstacle is contained in the simulation region. The normal component of the velocity is removed if a particle collides with the obstacle. Since the complete obstacle is not contained in the simulation region, a steady state can not be achieved if no flow occurs through the obstacle. This is because the electric field would be zero at the back edge of the simulation region inside of the obstacle so that the incoming magnetic flux cannot

be let out of the simulation region. Because only the front edge of the obstacle is retained in the calculation, magnetic flux cannot be eliminated by reconnection, as occurs in two dimensional MHD calculations when the entire obstacle is kept in the grid (Ogino et. al., 1988). It should be noted that two dimensional MHD simulations with an obstacle suffer from similar problems with regards to the magnetic flux.

In the present calculation, in order to let flow occur through the obstacle the coordinate perpendicular to the simulation plane is kept for the particles. Particles that collide with the obstacle can then flow through it after many collisions, provided the obstacle is treated as an object with a finite extent out of the simulation plane. A steady state then becomes possible and simulations show that indeed a steady state is achieved. The plasma density for such a steady state is shown in Fig. 1. Once a steady state is achieved, the shock is separated from the obstacle and so the obstacle does not impact the processes occurring at the shock front. Initial results suggest that high energy particles exiting the shock from the quasiparallel side of the shock originate from multiple reflections of incoming ions on the shock surface, as shown in Fig. 2.

References

- Goodrich, C. C., Numerical simulations of quasi perpendicular collisionless shocks, in *Collisionless Shocks in the Heliosphere: Reviews of current Research*, AGU, 1985.
- Harned, D. S., Quasineutral hybrid simulation of macroscopic plasma phenomena, *J. Comp. Phys.*, 17, 152, 1982.
- Ogino, T., R. J. Walker, and M. Ashour Abdalla, An MHD simulation of the interaction of the solar wind with the outflowing plasma from a comet, *Geophys. Res. Lett.*, 13, 929, 1986.
- Queat, K. B., Hybrid simulations, in *Third International School for Space Simulation: Tutorial Courses*, Cepadue Editions, Toulouse, France, 1989.

Spreiter, J. R., and S. S. Stahara. Magnetohydrodynamic and gasdynamic theories for planetary bow waves, in *Collisionless Shocks in the Heliosphere: Reviews of Current Research*. AGU, 1985.

Terasawa, T., M. Hoshino, J-I. Sakai, and T. Hada, Decay instability of finite-amplitude circularly polarized Alfvén waves: a numerical simulation of stimulated Brillouin scattering. *J. Geophys. Res.*, 19, 4171, 1986.

Walker, R. J., and T. Ogino. Global magnetohydrodynamic simulations of the magnetosphere. *IEEE Transactions on Plasma Science*, 17, 135, 1989.

Figure Captions

Figure 1. Plasma density relative to the incoming value after steady shock is achieved. The Alfvén Mach number is 10. The calculation is performed on a 700 by 160 grid and involves ≈ 2.5 million particle ions.

Figure 2. Generation of energetic particles at the shock front. Shown is the magnetic field lines (solid lines), the shock surface determined from the density jump (thick solid line), and test particle trajectories for (a) those test particles that had more than four times the initial ram energy at some time during their orbit and (b) those test particles that had more than nine times the ram energy at some point in their orbit.

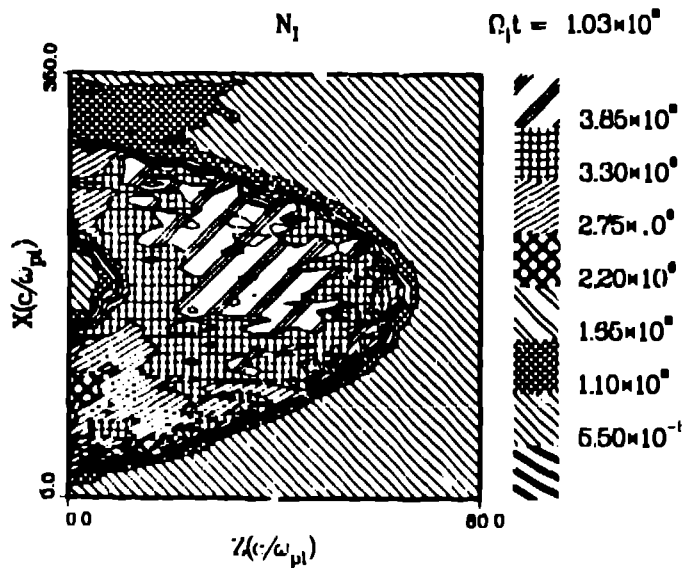


Figure 1.

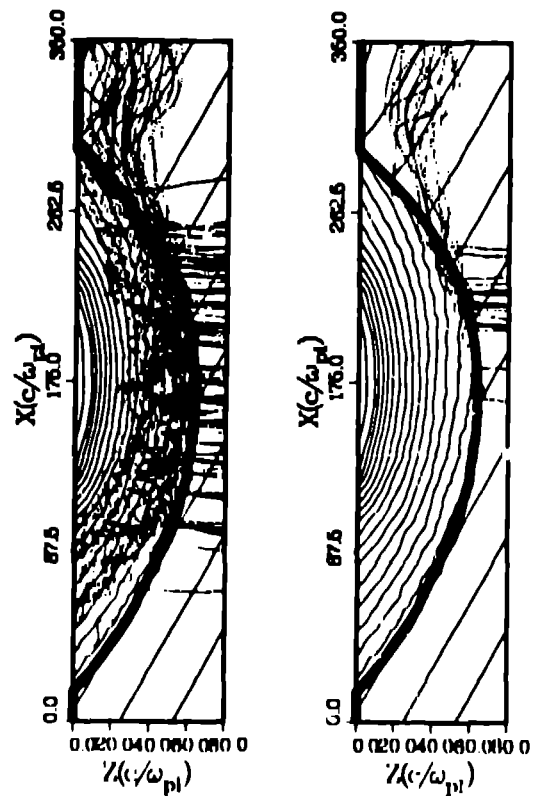


Figure 2.