

**LA-7811-MS**

Informal Report

C.3

CIC-14 REPORT COLLECTION

**REPRODUCTION  
COPY**

**An Analytic Method for Calculating the  
Time-Temperature History of Metal Foils  
Under Pulsed Irradiation and a Gaussian Beam Profile**

University of California



**LOS ALAMOS SCIENTIFIC LABORATORY**

Post Office Box 1663 Los Alamos, New Mexico 87545

**An Affirmative Action/Equal Opportunity Employer**

**This report was not edited by the Technical Information Staff.**

**This work was supported by the US Department of Energy,  
Division of Basic Energy Sciences.**

**This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights.**

**UNITED STATES  
DEPARTMENT OF ENERGY  
CONTRACT W-7405-ENG. 36**

LA-7811-MS  
Informal Report

UC-25  
Issued: May 1979

**An Analytic Method for Calculating the  
Time-Temperature History of Metal Foils  
Under Pulsed Irradiation and a Gaussian Beam Profile**

L. N. Kmetyk\*  
W. F. Sommer



\* Visiting Scientist. Columbia University, New York, NY 10027.



AN ANALYTIC METHOD FOR CALCULATING THE TIME-TEMPERATURE HISTORY  
OF METAL FOILS UNDER PULSED IRRADIATION AND A GAUSSIAN BEAM PROFILE

by

L. N. Kmetyk and W. F. Sommer

ABSTRACT

Utilization of a pulsed radiation source such as the Clinton P. Anderson Meson Physics Facility (LAMPF) for materials science studies requires knowledge of the time-temperature history of a subject metal foil. We derive an analytic solution to a two-dimensional heat flow equation, incorporating the LAMPF time structure and the LAMPF Gaussian beam spot profile. This calculational method is useful in designing experimental systems for materials science studies and can be done on a Hewlett-Packard model 97 desk-top calculator. We compare the results with an equivalent numerical solution of the same two-dimensional heat flow problem done on a digital computer.

---

I. INTRODUCTION

We utilize the 800-MeV proton beam at LAMPF as a source for radiation damage, materials science studies. Materials phenomenon are strongly temperature dependent. The calculation described here is used in the design of experimental systems to give a theoretical prediction of the temperature history of a subject foil. Since large temperature excursions during a pulse are not usable conditions for an experiment, we consider constant physical properties, near the design point in temperature, for the materials under study. Although our calculations reflect the LAMPF time structure (0.5 ms "on time" at 120 Hz), any time structure may be analyzed by insertion of the proper values of  $\tau$ , the time between pulses, and  $\tau_1$ , the pulse length. We also incorporate a Gaussian beam profile; typical of the LAMPF beam. We approximate elliptical beam spots by an equivalent circular area. We assume that a coolant such as flowing water will maintain a constant temperature (coolant temperature plus film temperature

gradient) at the surface of an emersed foil and at a radius of  $3\sigma$ ;  $\sigma$  is one standard deviation. The calculation can be done for any material for which the physical properties and particle energy dissipation characteristics are known.

## II. EQUATIONS

The two-dimensional time-dependent heat conduction equation in cylindrical coordinates is

$$\frac{1}{\kappa} \frac{\partial T}{\partial t} - \frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial T}{\partial r} \right) - \frac{\partial^2 T}{\partial z^2} = \frac{1}{\kappa} Q. \quad (1)$$

The region of interest is a finite cylinder of height  $l$  and radius  $a$ , whose surface is held at a fixed temperature  $T_0 = T(t=0)$  (Figure 1). Treating the right-hand side of equation (1) as a source term allows us to write the formal solution in terms of the Green's function for the homogeneous equation as<sup>1</sup>

$$T(r, z, t) = \frac{\kappa}{K} \int_0^a \int_0^l \int_0^t G(r, r'; z, z'; t, t') Q(r', z', t') 2\pi r' dr' dz' dt'. \quad (2)$$

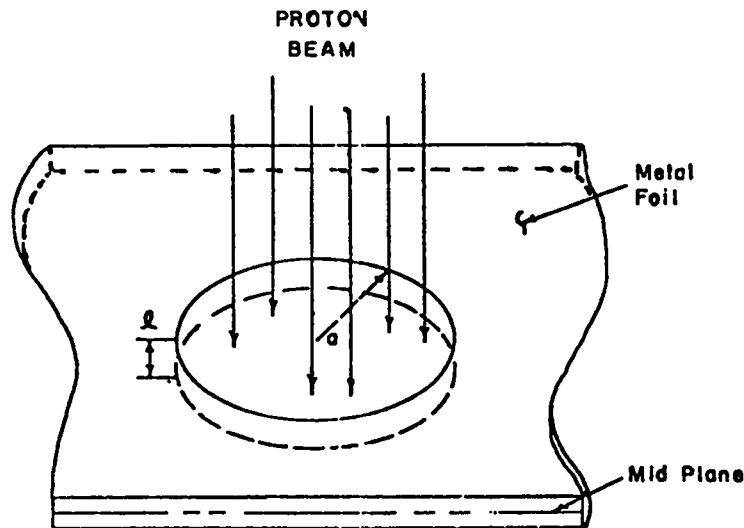


Fig. 1.  
Foil geometry.

To find the necessary Green's function we use the method of separation of variables on the modified heat conduction equation

$$\frac{1}{\kappa} \frac{\partial G}{\partial t'} - \frac{1}{r'} \frac{\partial}{\partial r'} \left( r' \frac{\partial G}{\partial r'} \right) - \frac{\partial^2 G}{\partial z'^2} = 0. \quad (3)$$

Assuming  $G(r', z', t') = R(r')Z(z')\Theta(t')$  gives

$$0 = \frac{1}{\kappa\Theta(t')} \frac{\partial\Theta(t')}{\partial t'} - \frac{1}{r'R(r')} \frac{\partial}{\partial r'} \left( r' \frac{dR(r')}{dr'} \right) - \frac{1}{Z(z')} \frac{d^2Z(z')}{dz'^2}, \quad (4)$$

which breaks up into the three ordinary differential equations

$$\frac{d\Theta(t')}{dt'} = - (c_r^2 + c_z^2)\kappa\Theta(t') \quad (5)$$

$$\frac{d^2Z(z')}{dz'^2} = - c_z^2 Z(z') \quad (6)$$

$$\frac{1}{r'} \frac{d}{dr'} \left( r' \frac{dR(r')}{dr'} \right) = - c_r^2 R(r'). \quad (7)$$

Equation (7) is the standard equation obeyed by Bessel functions of order zero

$$r'^2 \frac{d^2R}{dr'^2} + r' \frac{dR}{dr'} + (r'^2 - (n=0)^2) R = 0, \quad (8)$$

where  $r'^* = c_r r'$ . The boundary condition on this radial equation is

$$T(a, z, t) = 0 \text{ (or a constant)}, \quad (9)$$

giving immediately  $r' = a \leftrightarrow r'^* = \alpha_n$ , where  $\alpha_n$  is the nth zero of  $J_0(r'^*)$ , so that

$$c_r = \frac{\alpha_n}{a} . \quad (10)$$

(The zeroth order Bessel function of the second kind is eliminated since it cannot satisfy boundedness at  $r = 0$ .) The solution to the radial equation is then

$$R(r') = \sum_{\alpha_n} A_n J_0 \left( \alpha_n \frac{r'}{a} \right) , \quad (11)$$

where the coefficient  $A_n$  is determined from the conditions

$$R(r' = r) = \delta(r' - r) = f(r') \quad (12)$$

to be

$$f(r') = \sum_{\alpha_n} A_n J_0 \left( \alpha_n \frac{r'}{a} \right) ,$$

$$\int_0^a 2\pi r' dr' J_0 \left( \alpha_m \frac{r'}{a} \right) \delta(r' - r) = \int_0^a 2\pi r' dr' \sum_{\alpha_n} A_n J_0 \left( \alpha_n \frac{r'}{a} \right) J_0 \left( \alpha_m \frac{r'}{a} \right) ,$$

$$J_0 \left( \alpha_m \frac{r}{a} \right) = \pi a^2 A_m \left[ J_1^* \left( \alpha_m \right) \right]^2 ,$$

$$A_m = \frac{1}{\pi a^2} \frac{J_0 \left( \alpha_m \frac{r}{a} \right)}{\left[ J_0' \left( \alpha_m \right) \right]^2} , \quad (13)$$

giving finally

$$R(r, r') = \frac{1}{\pi a^2} \sum_{\alpha_n} \frac{J_0 \left( \alpha_n \frac{r'}{a} \right) J_0 \left( \alpha_n \frac{r}{a} \right)}{\left[ J_0' \left( \alpha_n \right) \right]^2} . \quad (14)$$

Equation (6) is even simpler in that the solutions are trigonometric rather than Bessel Functions. Using the boundary condition

$$Z(z' = 0) = Z(z' = l) = 0 \quad (15)$$

gives the solution

$$Z(z') = \sum_m B_m \sin\left(\frac{m\pi z}{l}\right), \quad (16)$$

where the cosines disappear because of the  $z = 0$  condition, and the  $z = l$  condition gives

$$c_z l = m\pi \text{ or } c_z = \frac{m\pi}{l}. \quad (17)$$

The coefficients  $B_m$  are evaluated using

$$Z(z'=z) = \delta(z-z') = f(z') \quad (18)$$

to give

$$\int_0^l \sin\left(\frac{m\pi z}{l}\right) \delta(z-z') dz' = \int_0^l \sum_m A_m \sin\left(\frac{m\pi z'}{l}\right) \sin\left(\frac{m\pi z'}{l}\right) dz' \quad (19)$$

$$\sin\left(\frac{n\pi z}{l}\right) = \frac{l}{2} A_n$$

$$A_n = \frac{2}{l} \sin\left(\frac{n\pi z}{l}\right)$$

giving finally



$$z(z, z') = \frac{2}{l} \sum_m \sin\left(\frac{m\pi z'}{l}\right) \sin\left(\frac{m\pi z}{l}\right). \quad (20)$$

Utilizing the results of equations (10) and (17) allows equation (5) to be written as

$$\frac{d\theta(t')}{dt'} = -\kappa \left( \frac{\alpha_n^2}{a^2} + \frac{(m\pi)^2}{l^2} \right) \theta(t'), \quad (21)$$

whose solution is

$$(t, t') = \sum_n \sum_m \exp \left\{ -\kappa \left[ \frac{\alpha_n^2}{a^2} + \frac{(m\pi)^2}{l^2} \right] (t-t') \right\}. \quad (22)$$

Thus the Green's function for this problem is

$$G(r, r'; z, z'; t, t') = \frac{2}{\pi a^2 l} \sum_{m=1}^{\infty} \exp \left[ -\kappa \frac{m^2 \pi^2}{l^2} (t-t') \right] \sin\left(\frac{m\pi z}{l}\right) \sin\left(\frac{m\pi z'}{l}\right) \\ \times \sum_n \exp \left[ -\kappa \frac{\alpha_n^2}{a^2} (t-t') \right] \frac{J_0\left(\alpha_n \frac{r}{a}\right) J_0\left(\alpha_n \frac{r'}{a}\right)}{\left[ J_0'(\alpha_n) \right]^2}. \quad (23)$$

### III. APPLICATION

The LAMPF 800-MeV pulsed proton beam has an elliptically shaped target area approximated here by a circular area of radius  $a$ . Irradiation and heating of a thin rectangular foil whose edges and surface are held constant at the initial temperature can be approximated by considering heat conduction and generation in a finite cylinder large enough that the radial edges see little radiation. The proton flux for the LAMPF beam is Gaussian in profile and hence can be described as

$$I(r, z, t) = I(t) \exp\left(-\frac{r^2}{r_0^2}\right), \quad (24)$$

where  $r_0$  is a constant ( $= \sqrt{2}$  where  $\sigma$  is the standard deviation of the Gaussian profile) giving the average size of the beam spot and  $I(t)$  is a pulsed time function equal to

$$I(t) = \begin{cases} 0 & \text{for } t < 0 \\ I_0 & \text{for } m\tau \leq t \leq m\tau + \tau_1 \\ 0 & \text{for } m\tau + \tau_1 \leq t \leq (m+1)\tau \end{cases}, \quad (25)$$

where  $m = 0, 1, 2, \dots$ ,  $\tau_1 = 0.5 \text{ ms}$  and  $\tau = \frac{1}{120 \text{ Hz}}$ . For a net current of 1 mA,  $I_0$  is given by

$$I_0 = \frac{n_p / \Delta t}{\int_0^a 2\pi r \exp\left(-\frac{r^2}{r_0^2}\right) dr} \approx \frac{n_p / \Delta t}{\pi r_0^2}, \quad (26)$$

where  $n_p$  is the total number of protons in a pulse of duration  $\Delta t$ , given by

$$\begin{aligned} n_p &= 1 \text{ mA} \times \frac{10^{-3} \text{ C}}{\text{sec-mA}} \times 6.28 \times 10^{18} \frac{\text{p}}{\text{C}} \times \frac{1}{120 \text{ pulse/sec}} \\ &= 5.233 \times 10^{13} \frac{\text{p}}{\text{pulse}} \end{aligned} \quad (27)$$

for a net current of 1 mA. If each 800-MeV proton loses an amount of energy  $\epsilon^*$  per unit distance traversed in the target, and if all this energy is assumed to produce heat by direct excitation of the lattice, the heat generation rate per unit volume is

$$Q = \epsilon^* \frac{n_p / \Delta t}{\pi r_0^2} \exp\left[-\frac{r^2}{r_0^2}\right] \quad (28)$$

whenever the beam is on, and zero otherwise. To insure that most of the beam is accounted for we set  $a = 3\sigma = 2.12132r_0$  (by which time we are using 99% of the current).

The temperature is given by equations (2) and (23) as

$$T(r, z, t) - T_0 = \frac{\kappa}{K} Q \frac{2}{\pi a^2 \ell} \sum_{m=1}^{\infty} \sum_{\alpha_n} \int_0^t \exp \left[ -\kappa \left( \frac{m^2 \pi^2}{\ell^2} + \frac{\alpha_n^2}{a^2} \right) (t-t') \right] f(t') dt' \quad (29)$$

$$\times \int_0^a 2\pi r' \exp \left( -\frac{r'^2}{r_0^2} \right) \frac{J_0(\alpha_n \frac{r'}{a}) J_0(\alpha_n \frac{r}{a})}{[J_0'(\alpha_n)]^2} dr' \int_0^{\ell} \sin \left( \frac{m\pi z}{\ell} \right) \sin \left( \frac{m\pi z'}{\ell} \right) dz',$$

where  $f(t')$  is a pulsed time function such as given by equation (25) but normalized to unity.

The integration in  $z'$  is readily carried out to give

$$\int_0^{\ell} \sin \left( \frac{m\pi z}{\ell} \right) \sin \left( \frac{m\pi z'}{\ell} \right) dz' = \frac{2\ell}{m\pi} \sin \left( \frac{m\pi z}{\ell} \right) \quad m = 1, 3, 5, \dots \quad (30)$$

and the summation over odd  $m$  can be rewritten as  $m \rightarrow 2m+1$ . The integration in  $r'$  can only be approximated, using the definite integral

$$\int_0^{\infty} r'^{\nu+1} e^{-a^2 r'^2} J_{\nu}(br) dr = \frac{b^{\nu}}{(2a)^{\nu+1}} \exp \left[ -\frac{b^2}{4a^2} \right] \quad (31)$$

to give

$$\int_0^a 2\pi r' \frac{J_0(\alpha_n \frac{r'}{a}) J_0(\alpha_n \frac{r}{a})}{[J_0'(\alpha_n)]^2} \exp \left[ -\frac{r'^2}{r_0^2} \right] dr' \approx 2\pi \frac{J_0(\alpha_n \frac{r}{a})}{J_1^2(\alpha_n)} \sigma^2 \exp \left[ -\frac{\alpha_n^2}{18} \right]$$

$$\approx \pi r_0^2 \frac{J_0(\alpha_n \frac{r}{a})}{J_1^2(\alpha_n)} \exp \left( -\frac{\alpha_n^2}{18} \right), \quad (32)$$

where we have used the relations  $J_0'(\alpha_n) = J_1(\alpha_n)$  and  $2\sigma^2 = r_0^2 = \frac{a^2}{4.5}$ .  
 Due to the rapidly decaying nature of the Gaussian the approximation  $\sim \infty$  in the integration limit is quite reasonable.

The integration in  $t'$  is done by defining the integral

$$I_{\alpha m} = \beta_{\alpha m} \int_0^t \exp(\beta_{\alpha m} t') f(t') dt', \quad (33)$$

where

$$\beta_{\alpha m} = \left( \frac{\alpha_n^2}{a^2} + \frac{(2m+1)^2 \pi^2}{l^2} \right). \quad (34)$$

Since  $f(t')$  only exists for  $k\tau \leq t \leq k\tau + \tau_1$  the integral  $I_{\alpha m}$  reduces to

$$\begin{aligned} I_{\alpha m} = & \beta_{\alpha m} \int_0^{\tau_1} \exp(\beta_{\alpha m} t') dt' + \int_{\tau}^{\tau+\tau_1} \beta_{\alpha m} \exp(\beta_{\alpha m} t') dt + \dots + \\ & + \beta_{\alpha m} \int_{(k-1)\tau}^{(k-1)\tau+\tau_1} \exp(\beta_{\alpha m} t') dt' \\ & + \int_{k\tau}^{t \text{ or } k\tau+\tau_1} \beta_{\alpha m} \exp(\beta_{\alpha m} t') dt'. \end{aligned} \quad (35)$$

The lower limits give the sum

$$-1 - \exp(\beta_{\alpha m} \tau) - \exp(2\beta_{\alpha m} \tau) - \dots - \exp(k\beta_{\alpha m} \tau) = \frac{\exp[(k+1)\beta_{\alpha m} \tau] - 1}{1 - \exp(\beta_{\alpha m} \tau)}, \quad (36)$$

while the upper limits give

$$\exp(\beta_{\alpha m} \tau_1) \left\{ 1 + \exp(\beta_{\alpha m} \tau) + \exp(\beta_{\alpha m} 2\tau) + \dots + \exp[(k-1)\beta_{\alpha m} \tau] \right\}$$

$$+ \begin{cases} \exp (\beta_{\alpha m} \tau) \\ \exp [\beta_{\alpha m} (k\tau + \tau_1)] \end{cases} \quad (37)$$

$$= \exp (\beta_{\alpha m} \tau_1) \left[ \frac{\exp (k\beta_{\alpha m} \tau) - 1}{\exp (\beta_{\alpha m} \tau) - 1} \right] + \begin{cases} \exp (\beta_{\alpha m} t) \\ \exp [\beta_{\alpha m} (k\tau + \tau_1)] \end{cases} \quad (38)$$

Combining these results yields

$$I_{\alpha m} = \frac{1 - \exp [(k+1)\beta_{\alpha m} \tau] + \exp [\beta_{\alpha m} (k\tau + \tau_1)] - \exp (\beta_{\alpha m} \tau_1)}{\exp (\beta_{\alpha m} \tau) - 1} + \begin{cases} \exp (\beta_{\alpha m} \tau) \\ \exp [\beta_{\alpha m} (k\tau + \tau_1)] \end{cases},$$

where the two final terms refer respectively to times inside and between pulses.

Putting together equations (29), (30), (32) and (38) gives as the entire solution

$$T(r, z, t) - T_0 = \frac{K}{K} Q \frac{2}{\pi a^2 \ell} \sum_m \left[ \frac{2\ell}{(2m+1)\pi} \sin \left( \frac{(2m+1)\pi z}{\ell} \right) \right] \sum_n \left[ \pi r_0^2 \exp \left( - \frac{\alpha_n^2}{18} \frac{J_0(\alpha_n \frac{r}{a})}{J_1^2(\alpha_n)} \right) \right]$$

$$\times \left[ \frac{1}{K} \left( \frac{a^2 \ell^2}{\alpha_n^2 \ell^2 + (2m+1)^2 \pi^2 a^2} \right) \exp (-\beta_{\alpha m} t) \left\{ \frac{1 - \exp [(k+1)\beta_{\alpha m} \tau] + \exp [\beta_{\alpha m} (k\tau + \tau_1)] - \exp (\beta_{\alpha m} \tau_1)}{\exp (\beta_{\alpha m} \tau) - 1} + \exp (\beta_{\alpha m} t) \right\} \right] \quad (39a)$$

for  $k\tau \leq t \leq k\tau + \tau_1$

$$T(r, z, t) - T_0 = \frac{\kappa}{K} Q \frac{2}{\pi a^2 l} \sum_m \left[ \frac{2l}{(2m+1)\pi} \sin \left( \frac{(2m+1)\pi z}{l} \right) \right] \sum_n \left[ \pi r_0^2 \exp \left( -\frac{\alpha_n^2}{18} \right) \frac{J_0 \left( \alpha_n \frac{r}{a} \right)}{J_1^2 \left( \alpha_n \right)} \right] \times$$

$$\left[ \frac{1}{\kappa} \left( \frac{a^2 l^2}{\alpha_n^2 l^2 + (2m+1)^2 \pi^2 a^2} \right) \exp(-\beta_{\alpha m} t) \left\{ \frac{1 - \exp[(k+1)\beta_{\alpha m} \tau] + \exp[\beta_{\alpha m} (k\tau + \tau_1)] - \exp(\beta_{\alpha m} \tau_1)}{\exp(\beta_{\alpha m} \tau) - 1} \right. \right.$$

$$\left. \left. + \exp[\beta_{\alpha m} (k\tau + \tau_1)] \right\} \right] \quad (39b)$$

for  $k\tau + \tau_1 \leq t \leq (k+1)\tau$ .

Rearranging the constants and returning to the  $I_{\alpha m}$  notation gives

$$T(r, z, t) = T_0 + \frac{Q}{K} \frac{8}{9\pi} \sum_m \frac{\sin \frac{(2m+1)\pi z}{l}}{(2m+1)} \sum_n \exp \left( -\frac{\alpha_n^2}{18} \right) \frac{J_0 \left( \alpha_n \frac{r}{a} \right)}{J_1^2 \left( \alpha_n \right)} \frac{\kappa}{\beta_{\alpha m}} \exp(-\beta_{\alpha m} t) I_{\alpha m} \quad (39c)$$

#### IV. RESULTS

We have used this calculational method for evaluating various irradiation locations and experimental systems at LAMPF. Figure 2 is a schematic of a typical result. This plot represents the temperature-time history at the mid-plane of a metal foil, at the center of the Gaussian beam spot. This result generalizes and may be extended to an entire family of  $(r, z)$  positions which gives the total temperature profile of the foil at a given time.

The calculation had been done previously by numerical methods on a digital computer. A comparison of the results from the two methods is shown in Table I. Run time on a HP-97 calculator for a given time and position  $(r, z)$  is approximately 4 min.

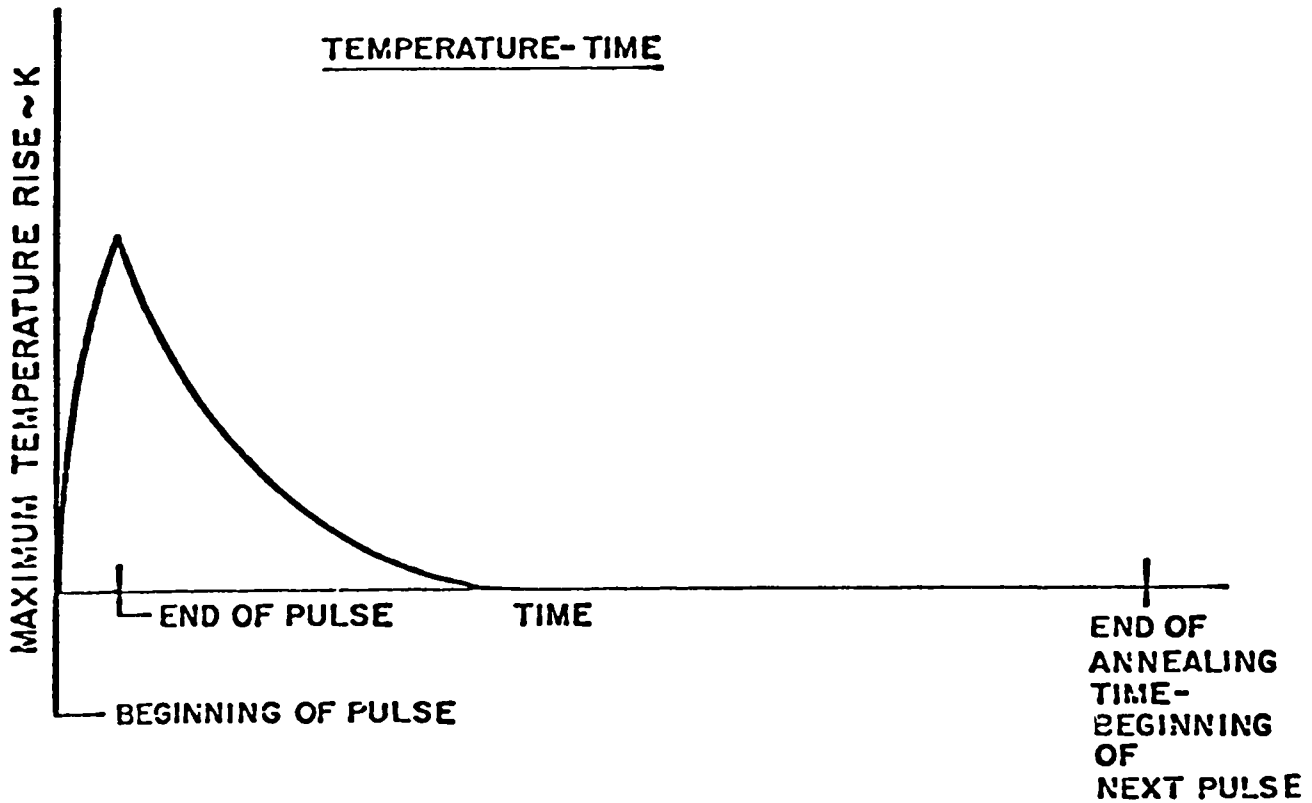


Figure 2. Schematic of the temperature - time profile of a metal foil under pulsed irradiation at the foil mid-plane and at the center of a Gaussian beam spot.

TABLE I

COMPARISON OF THE ANALYTIC AND NUMERICAL TEMPERATURE CALCULATION

Material		Aluminum	
$\ell$	-	$1 \times 10^{-3} \text{ m}$	
$r_0$	-	$1.94 \times 10^{-3} \text{ m}$	
$I_0$	-	$8.87 \times 10^{21} \text{ pm}^{-2} \text{ s}^{-1}$	
$r$	-	0	
$T_0$	-	400 K	
Time		Temperature	
		Numerical	Calculator
$5 \times 10^{-4}$		535.304	535.338
$1 \times 10^{-3}$		494.003	491.702
$2.8 \times 10^{-3}$		418.764	416.742
$8.3 \times 10^{-3}$		400.154	400.095

#### ACKNOWLEDGEMENT

We thank W. V. Green for his encouragement in this endeavor.

#### REFERENCE

1. H. S. Carslaw and J. C. Jaeger, *Conduction of Heat in Solids*, Second Edition (Clarendon Press Oxford, 1959), pp. 21 and 368.



Printed in the United States of America. Available from  
National Technical Information Service  
US Department of Commerce  
5285 Port Royal Road  
Springfield, VA 22161

Microfiche \$3.00

001-025	4.00	126-150	7.25	251-275	10.75	376-400	13.00	501-525	15.25
026-050	4.50	151-175	8.00	276-300	11.00	401-425	13.25	526-550	15.50
051-075	5.25	176-200	9.00	301-325	11.75	426-450	14.00	551-575	16.25
076-100	6.00	201-225	9.25	326-350	12.00	451-475	14.50	576-600	16.50
101-125	6.50	226-250	9.50	351-375	12.50	476-500	15.00	601-up	

Note: Add \$2.50 for each additional 100-page increment from 601 pages up.